


SPECIFICATIONS

Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:550V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PA6T,UL94V-0
 Soldering Temperature:+260°C,5S~8S max

Dimension						
H	W	PA	PB	PC	PD	PW
3.50	2.50	/	/	/	0.40	4.10
5.00	2.50	/	/	/	0.40	4.10
5.70	2.50	/	/	/	0.40	4.10
7.10	2.50	/	/	/	0.40	4.10
8.00	2.50	/	/	/	0.40	4.10
8.50	2.50	/	/	/	0.40	4.10

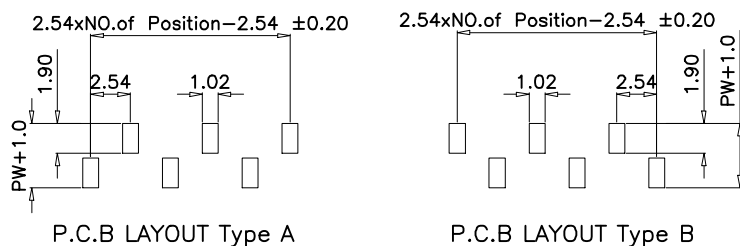

FH254Hxx-SMT-XXxP

Insulator height
 3.50mm: 350
 5.00mm: 500
 5.70mm: 570

No. of Circuits
 1: Single row
 2: Dual row

ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4	PART NO.	FH254Hxx-SMT-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1	TITLE	2.54mm Female Header Single Row Straight SMT Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL				PROJ.	◆ ←		