

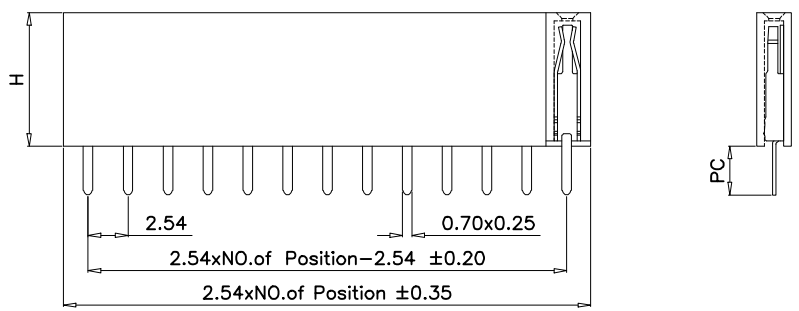


1 2 3 4 5 6 7 8 9 10


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

SPECIFICATIONS
 Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:550V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PBT
 Soldering Temperature:+220°C,10S max



Dimension						
H	W	PA	PB	PC	PD	PW
5.00	2.50	/	/	3.00	/	/
6.80	3.50	/	/	3.00	/	/
7.10	2.50	/	/	3.00	/	/
8.50	2.50	/	/	3.00	/	/



P.C.B LAYOUT

FH254Hxx-ST-XxxP

Insulator height
 5.00mm: 500
 ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount
 No. of Circuits
 1: Single row
 2: Dual row

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.03.06	SIZE	A4	PART NO.	FH254Hxx-ST-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2010.03.06	SHEET	1/1	TITLE	2.54mm Female Header Single Row Straight Dip Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'	DIM	TOL		PROJ.	◆ ←		

1 2 3 4 5 6 7 8 9 10