
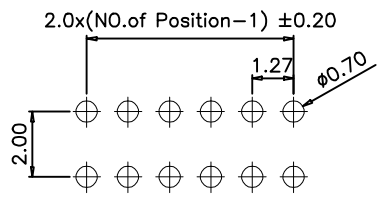
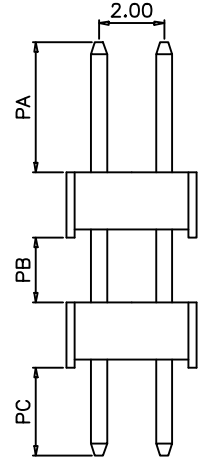
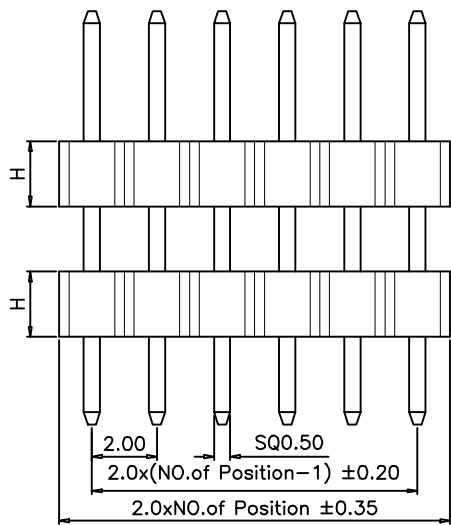


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

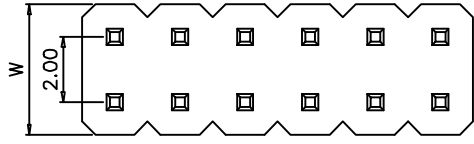

P.C.B LAYOUT

SPECIFICATIONS

Current Rating:1.5 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:450V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PBT
 Soldering Temperature:+220°C,10S max

| Dimension | | | | | | |
|-----------|------|------|------|------|----|----|
| H | W | PA | PB | PC | PD | PW |
| 1.00 | 4.00 | 4.00 | 4.00 | 2.70 | / | / |
| 1.50 | 4.00 | 4.00 | 3.00 | 2.70 | / | / |
| 2.00 | 4.00 | 4.00 | 2.00 | 2.70 | / | / |

PH200DHxx-ST-XXXP

Insulator height
 1.0mm:100
 1.50mm:150
 2.00mm:200

No. of Circuits
 1: Single row
 2: Dual row
 ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount

| | | | | | | | | | | | | |
|-----|----------|--------------------------|--------|---------|---------------|-------------|--------|------------|-------|-----|--|---|
| | | | | | OPERATION | DRAW | SIMON | 2010.03.06 | SCALE | | 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED | |
| | | | | | ~ 10 ±0.15 | DESIGN | | | UNIT | mm | | |
| | | | | | 20 ~ 30 ±0.30 | CHECK | MICKY | 2010.03.06 | SIZE | A4 | PART NO. | PH200DHxx-ST-2xXXP |
| 0 | 05/12/27 | NEW | | | 30 ~ ±0.50 | APPROVE | HELLEN | 2010.03.06 | SHEET | 1/1 | TITLE | 2.00mm Pin Header Dual Row Straight Dip Type |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | Angle DIM | ± 2' TOL | | | PROJ. | ◆ ← | | |

1 2 3 4 5 6 7 8 9 10