

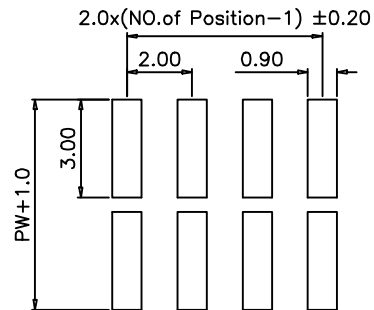
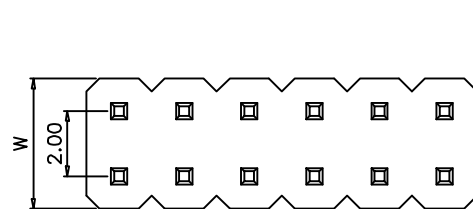


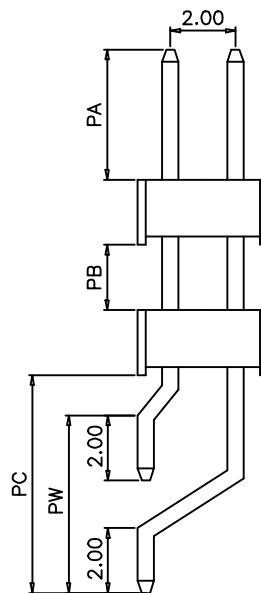

P.C.B LAYOUT

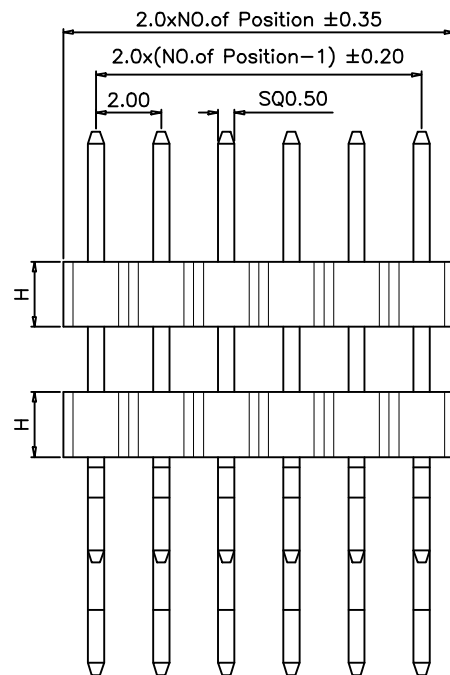

SPECIFICATIONS

Current Rating:1.5 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:450V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PBT
 Soldering Temperature:+220°C,10S max

Dimension						
H	W	PA	PB	PC	PD	PW
1.00	4.00	4.00	/	6.70	/	5.45
1.50	4.00	4.00	/	6.70	/	5.45
2.00	4.00	4.00	/	6.70	/	5.45

PH200DHxx-90C-SMT-XxxP

Insulator height
 1.0mm:100
 1.50mm:150
 2.00mm:200

No. of Circuits
 1: Single row
 2: Dual row
 ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount

H						OPERATION	DRAW	SIMON	2010.03.06	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30				SIZE	A4	PART NO.	PH200DHxx-90C-SMT-2xXXP
	0	05/12/27	NEW			30 ~ ±0.50	CHECK	MICKY	2010.03.06	SHEET	1/1	TITLE	2.00mm Pin Header Dual Row 90C SMT Type
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM ± 2' TOL	APPROVE	HELLEN	2010.03.06	PROJ.			