

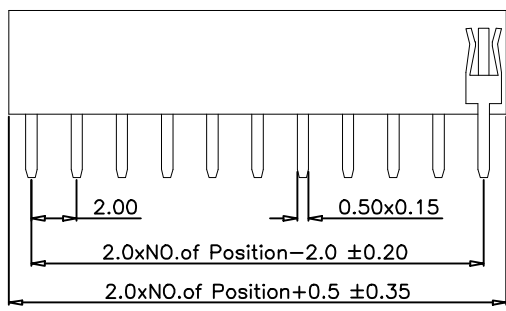


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G  
H


A  
B  
C  
D  
E  
F  
G  
H



**SPECIFICATIONS**

Current Rating:1.5 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:450V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PBT  
 Soldering Temperature:+220°C,10S max

Dimension						
H	W	PA	PB	PC	PD	PW
4.00	2.50	/	/	2.80	/	/
4.30	2.50	/	/	2.80	/	/
4.60	2.50	/	/	2.80	/	/
6.35	2.00	/	/	3.10	/	/

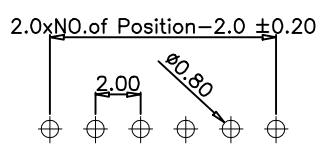

P.C.B LAYOUT

FH200Hxx-ST-XxxP

Insulator height  
 4.00mm: 400  
 4.30mm: 430  
 4.60mm: 460  
 6.35mm: 635

No. of Circuits  
 1: Single row  
 2: Dual row

ST: Straight 180°  
 RT: Right-angle 90°  
 SMT: Surface-Mount

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		<b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30				SIZE	A4	PART NO.	FH200Hxx-ST-XXP
0	05/12/27		NEW		30 ~ ±0.50	CHECK	MICKY	2010.03.06	SHEET	1/1	TITLE	2.0mm Female Header Single Row Straight Dip Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	HELLEN	2010.03.06	PROJ.	◆ ←		

1 2 3 4 5 6 7 8 9 10