

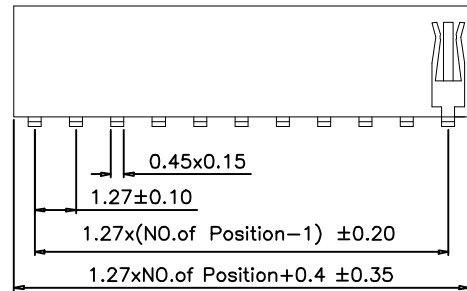


1 2 3 4 5 6 7 8 9 10


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

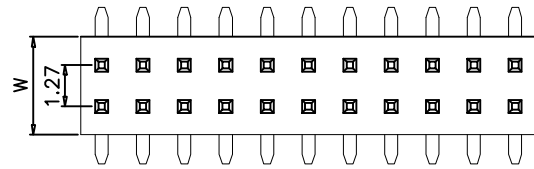

SPECIFICATIONS
 Current Rating:1.0 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:300V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PA6T
 Soldering Temperature:+260°C,5S~8S max

Dimension						
H	W	PA	PB	PC	PD	PW
2.00	3.00	/	/	/	0.30	4.40
3.40	3.00	/	/	/	0.30	4.80
4.30	3.00	/	/	/	0.30	4.80
4.40	3.00	/	/	/	0.30	4.80



P.C.B LAYOUT

FH127Hxx-SMT-XxxP

Insulator height
 2.0mm: 200
 3.40mm: 340
 4.30mm: 430
 4.40mm: 460

No. of Circuits
 1: Single row
 2: Dual row

ST: Straight 180°
 RT: Right-angle 90°
 SMT: Surface-Mount

					OPERATION	DRAW	SIMON	2010.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30				SIZE	A4	PART NO.	FH127Hxx-SMT-2xXXP
0	05/12/27		NEW		30 ~ ±0.50	CHECK	MICKY	2010.03.06	SHEET	1/1	TITLE	1.27mm Female Header Dual Row Straight SMT Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	HELLEN	2010.03.06	PROJ.	◆ ←		

1 2 3 4 5 6 7 8 9 10