
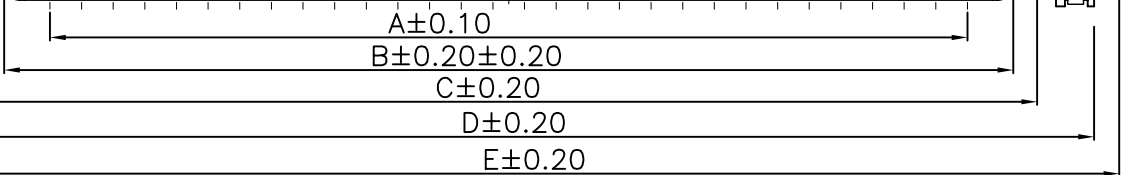


PART NO	DIMENSION				
	A	B	C	D	E
SCT1005H-20	19.00	21.90	23.30	27.00	28.60
SCT1005H-30	29.00	31.90	33.30	37.00	38.60

**SPECIFICATIONS**  
Voltage rating: 200V AC, DC  
Current rating: 0.5A, AC, DC (AWG#30)  
Withstanding Voltage: 500V AC/minute  
Insulation resistance: 100M Ωmin  
Temperature range: -40°C - +80°C  
Contact resistance: 20mΩ

**HOUSING**  
Part No: SCT1005H-XX  
Poles: 20, 30  
Material: Nylon 46, UL94V-0

**TERMINAL**  
Lock: Stainless steel  
Reinforce slice: Stainless steel

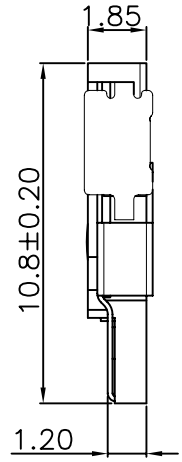

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		<b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT1005H-XX
					30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	FI-X 1.0mm (with lock)
0	05/12/27				Angle ± 2'				PROJ.	↯	DRAWING NO.	SCT1005
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							