

1 2 3 4 5 6 7 8 9 10

A

B

C





D

E

F

G

H

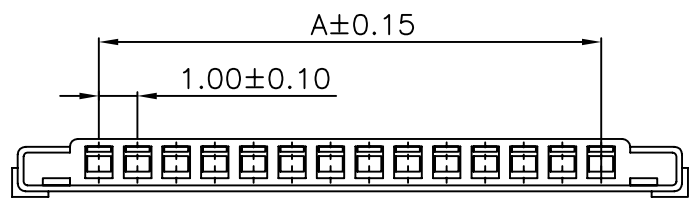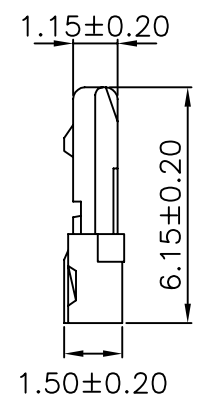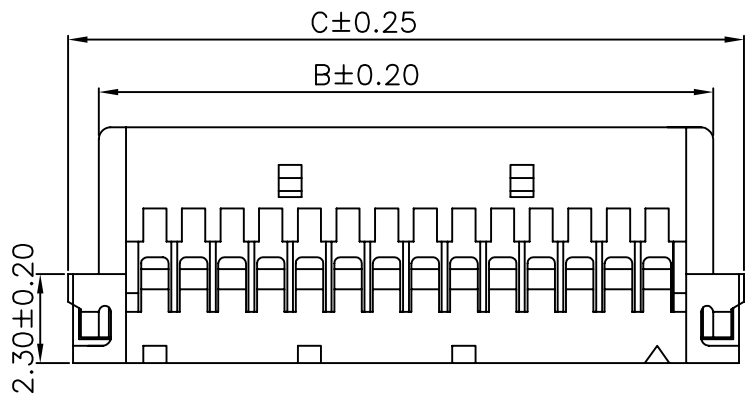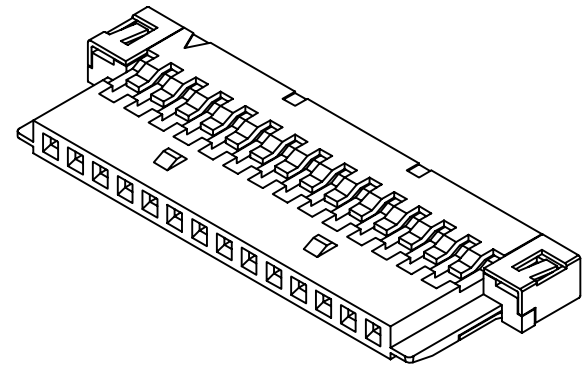


SPECIFICATIONS

Voltage rating: 100V AC, DC
 Current rating: 0.5A AC/DC
 Withstanding Voltage: 300V AC/minute
 Insulation resistance: 100MΩ min
 Temperature range: -25°C - +85°C
 Contact resistance: 30mΩ

HOUSING

Part No: SCT1009-XXP
 Poles: 8, 14P, 20P, 30P
 Material: PA66, UL94V-0

PART NO	DIMENSION		
	A	B	C
SCT1009H-08P	7.00	9.90	11.50
SCT1009H-14P	13.00	15.90	17.50
SCT1009H-20P	19.00	21.90	23.50
SCT1009H-30P	29.00	31.90	33.50

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT1009H-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	HRS DF19 1.0mm Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.	◆	DRAWING NO.	SCT1009

1 2 3 4 5 6 7 8 9 10