

1 2 3 4 5 6 7 8 9 10

A

A

B

B

C

C

D

D

E

E

F

F

G






G


SPECIFICATIONS

Voltage rating: 100V AC, DC
 Current rating: 0.5A AC/DC (AWG#28)
 Withstanding Voltage: 300V AC/minute
 Insulation resistance: 100MΩ min
 Temperature range: -25°C - +85°C
 Contact resistance: 30mΩ

TERMINAL

Part No: SCT1009TPG
 Thickness: 0.15mm
 Material: Phosphor. Bronze, Tin Plated.
 Wire Range: AWG#30-#32 (OD 0.6mm)
 Reel Q' ty: 20,000 pcs/reel

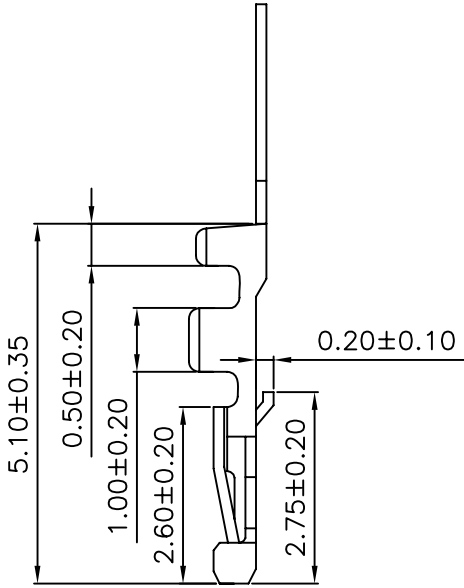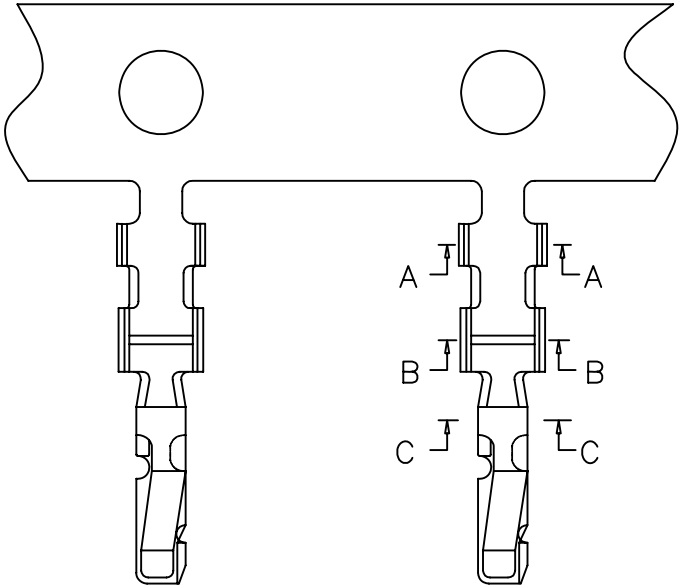

						OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT1009TPG
						30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	HRS DF19 1.0mm TERMINAL
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle ± 2'				PROJ.	◆ ←	DRAWING NO.	SCT1009
						DIM TOL							

1 2 3 4 5 6 7 8 9 10

H

H