

1 2 3 4 5 6 7 8 9 10

A

B

C





D

E

F

G

H

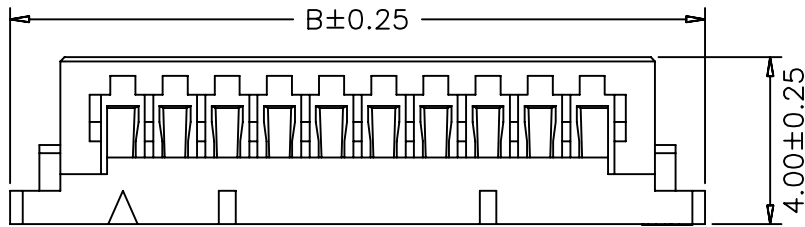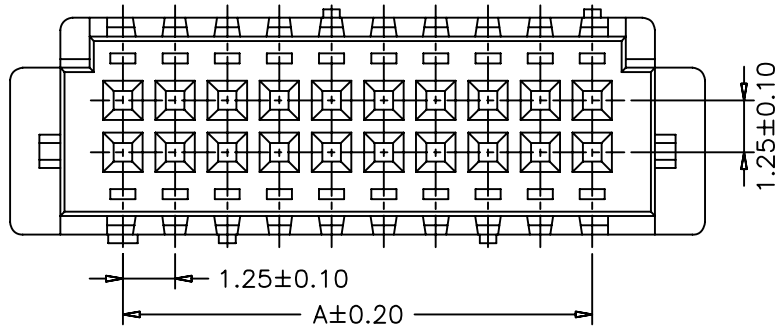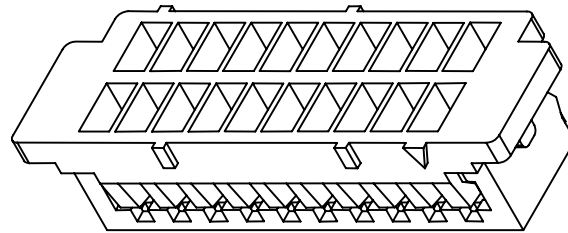


SPECIFICATIONS

Voltage rating: 150V AC, DC
 Current rating: 1A, AC, DC (AWG#28)
 Withstanding voltage: 500V AC/minute
 Insulation resistance: 500MΩ min
 Temperature range: -40°C - +85°C
 Contact resistance: 20mΩ max

HOUSING

Part No. :SCT1252H-2xXXP
 Poles:2-15P
 Material:Nylon 66 UL94V-0
 Q' TY: 1,000 pcs/bag

PART NO.	Dimensions	
	A	B
SCT1252H-2X05P	5.00	10.40
SCT1252H-2X10P	11.25	16.65
SCT1252H-2X15P	17.50	22.90
SCT1252H-2X20P	23.75	29.15

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT1252H-2xXXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	DF13 1.25 2xXXP HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2' DIM TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.	◆	DRAWING NO.	SCT1252H-2xXXP

1 2 3 4 5 6 7 8 9 10