



1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

A
B
C
D
E
F
G







SPECIFICATIONS

Voltage rating: 150V AC, DC
 Current rating: 1A, AC, DC (AWG#28)
 Withstanding voltage: 500V AC/minute
 Insulation resistance: 500M Ω min
 Temperature range: -25°C - +85°C
 Contact resistance: 30mΩ max

WAFER

Part No. :SCT1252WR-XXP
 Material:Nylon 66, UL94V-0
 Contact:Brass, Tin plated
 Sloder Tabs:Phosphor Bronze, Tin plated

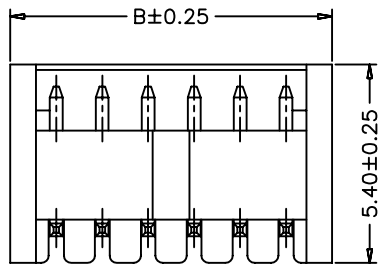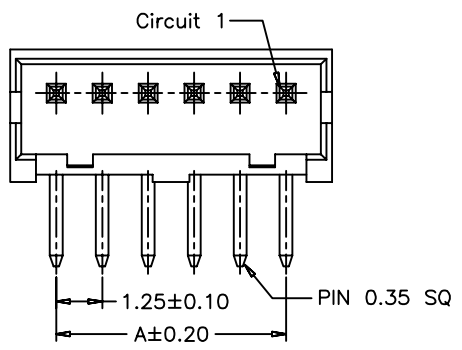

| PART NO. | Dimensions | |
|---------------|------------|-------|
| | A | B |
| SCT1252WR-02P | 1.25 | 3.75 |
| SCT1252WR-03P | 2.50 | 5.00 |
| SCT1252WR-04P | 3.75 | 6.25 |
| SCT1252WR-05P | 5.00 | 7.50 |
| SCT1252WR-06P | 6.25 | 8.75 |
| SCT1252WR-07P | 7.50 | 10.00 |
| SCT1252WR-08P | 8.75 | 11.25 |
| SCT1252WR-09P | 10.00 | 12.50 |
| SCT1252WR-10P | 11.25 | 13.75 |
| SCT1252WR-11P | 12.50 | 15.00 |
| SCT1252WR-12P | 13.75 | 16.25 |
| SCT1252WR-13P | 15.00 | 17.50 |
| SCT1252WR-14P | 16.25 | 18.75 |
| SCT1252WR-15P | 17.50 | 20.00 |

| | | | | | | | | | | | | |
|-----|----------|--------------------------|--------|---------|-----------------------|---------|------------|------------|-------------|-----|---|---------------------|
| | | | | | OPERATION | DRAW | Judy.Huang | 2006/05/02 | SCALE | | 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED | |
| | | | | | ~ 10 ±0.15 | DESIGN | | | UNIT | mm | | |
| | | | | | 20 ~ 30 ±0.30 | CHECK | Micky.Liu | 2006/05/02 | SIZE | A4 | PART NO. | SCT1252WR-XXP |
| 0 | 05/12/27 | | | | 30 ~ ±0.50 | APPROVE | Hellen.Li | 2006/05/02 | SHEET | 1/1 | TITLE: | DF13 1.25 90C WAFER |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | Angle ± 2° DIM TOL | PROJ. | | | DRIVING NO. | | | SCT1252WR-XXP |

1 2 3 4 5 6 7 8 9 10