

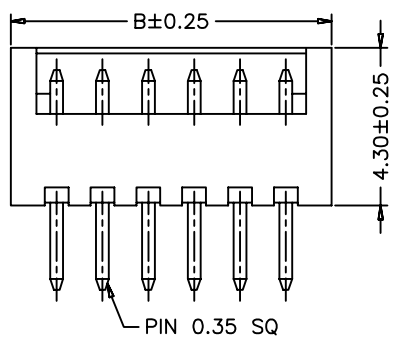



SPECIFICATIONS

Voltage rating: 150V AC, DC
 Current rating: 1A, AC, DC (AWG#28)
 Withstanding voltage: 500V AC/minute
 Insulation resistance: 500M Ω min
 Temperature range: -25°C - +85°C
 Contact resistance: 30m Ω max

WAFER

Part No. :SCT1252WV-XXP
 Material:Nylon 66, UL94V-0
 Contact:Brass, Tin plated
 Sloder Tabs:Phosphor Bronze, Tin plated

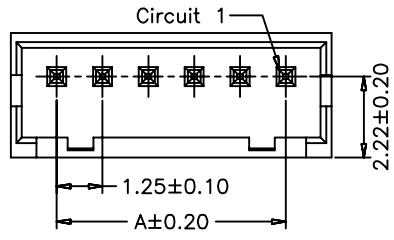

PART NO.	Dimensions	
	A	B
SCT1252WV-02P	1.25	3.75
SCT1252WV-03P	2.50	5.00
SCT1252WV-04P	3.75	6.25
SCT1252WV-05P	5.00	7.50
SCT1252WV-06P	6.25	8.75
SCT1252WV-07P	7.50	10.00
SCT1252WV-08P	8.75	11.25
SCT1252WV-09P	10.00	12.50
SCT1252WV-10P	11.25	13.75
SCT1252WV-11P	12.50	15.00
SCT1252WV-12P	13.75	16.25
SCT1252WV-13P	15.00	17.50
SCT1252WV-14P	16.25	18.75
SCT1252WV-15P	17.50	20.00

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
					~ 10 ±0.15	DESIGN			UNIT	mm			
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4		PART NO.	SCT1252WV-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1		TITLE:	DF13 1.25 180C WAFER
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.			DRAWING NO.	SCT1252WV-XXP