


SPECIFICATIONS

Voltage rating: 150V AC, DC
 Current rating: 1A, AC, DC (AWG#28)
 Withstanding voltage: 500V AC/minute
 Insulation resistance: 500MΩ min
 Temperature range: -40°C - +85°
 Contact resistance: 20mΩ max

HOUSING

Part No. :SCT1253HA-XXP
 Poles:2-30P
 Material:Nylon 66,UL94V-0
 Q' TY: 1,000 pcs/bag

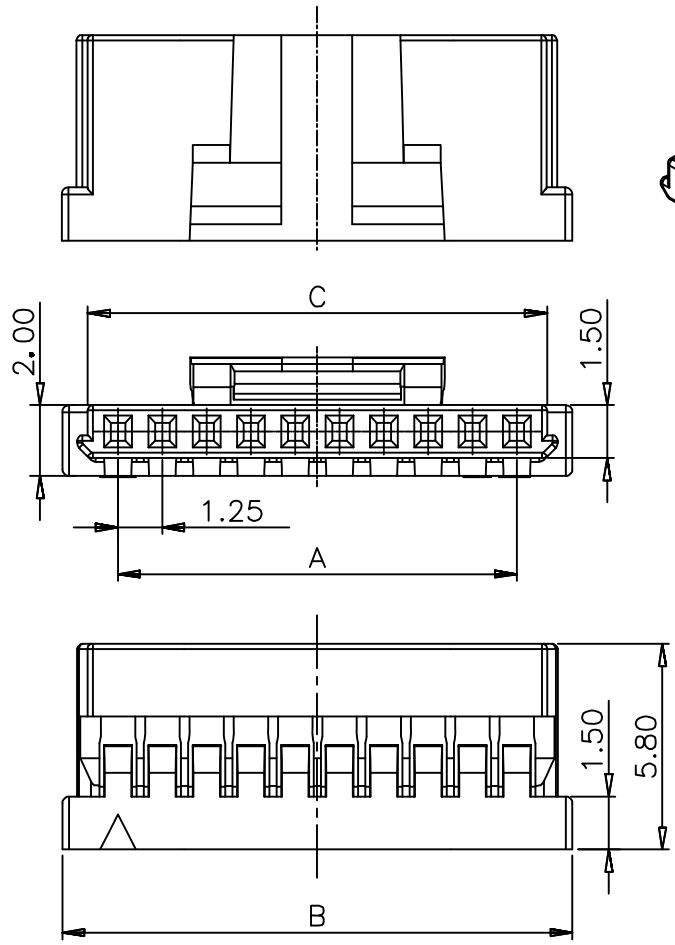

PART NO.	Dimensions		
	A	B	C
SCT1253HA-02P	1.25	4.40	2.75
SCT1253HA-03P	2.50	5.65	4.00
SCT1253HA-04P	3.75	6.90	5.25
SCT1253HA-05P	5.00	8.15	6.50
SCT1253HA-06P	6.25	9.40	7.75
SCT1253HA-07P	7.50	10.65	9.00
SCT1253HA-08P	8.75	11.90	10.25
SCT1253HA-09P	10.00	13.15	11.50
SCT1253HA-10P	11.25	14.40	12.75
SCT1253HA-11P	12.50	15.65	14.00
SCT1253HA-12P	13.75	16.90	15.25
SCT1253HA-13P	15.00	18.15	16.50
SCT1253HA-14P	16.25	19.40	17.75
SCT1253HA-15P	17.50	20.65	19.00
SCT1253HA-20P	23.75	26.90	25.25
SCT1253HA-25P	30.00	33.15	31.50
SCT1253HA-30P	36.25	39.40	37.75

					OPERATION	DRAW	YANG	2016.08.27	SCALE		森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2016.08.27	SIZE	A4	PART NO.	SCT1253HA-XXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	ALLEN	2016.08.27	SHEET	1/1	TITLE:	DF14 1.25 Housing with lock
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.		DRAWING NO.	SCT1253