
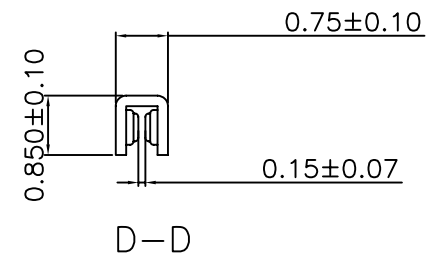




SPECIFICATIONS

Voltage rating: 150V AC, DC  
 Current rating: 1A, AC, DC (AWG#28)  
 Withstanding voltage: 500V AC/minute  
 Insulation resistance: 500M Ω min  
 Temperature range: -40°C - +85°C  
 Contact resistance: 20m Ω max

TERMINAL

Part No. :SCT1253T  
 Thickness:0.15mm  
 Material:Phosphor. Bronze, Tin plated  
 Wire Range:AWG#28-#32 (OD0.8mm)  
 Reel Q'ty: 10,000 pcs/reel



					OPERATION	DRAW	CHENA	05/12/25	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky	05/12/25	SIZE	A4	PART NO.	SCT1253T
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	05/12/25	SHEET	1/1	TITLE:	DF14 1.25 TERMINAL
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM				PROJ.	☯	DRAWING NO.	SCT1253