



02P




03P

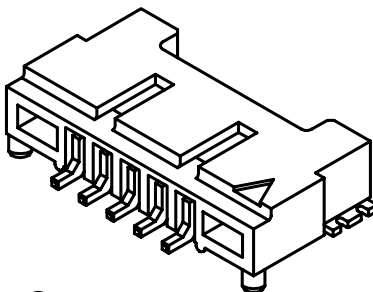


SPECIFICATIONS


Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

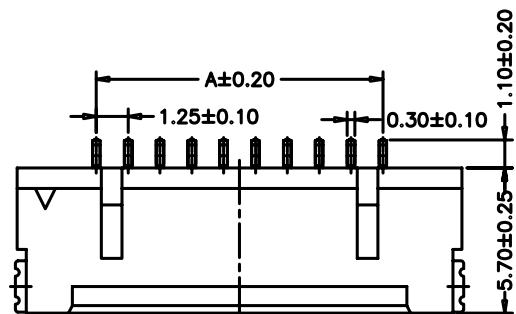

04P~30P

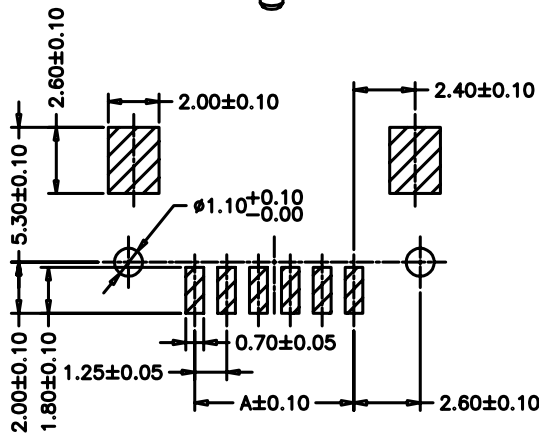

P.C.B. LAYOUT

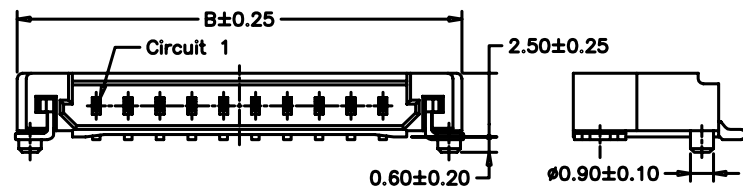

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
SCT1253WR-SF-02P	1.25	7.45
SCT1253WR-SF-03P	2.50	8.70
SCT1253WR-SF-04P	3.75	9.95
SCT1253WR-SF-05P	5.00	11.20
SCT1253WR-SF-06P	6.25	12.45
SCT1253WR-SF-07P	7.50	13.70
SCT1253WR-SF-08P	8.75	14.95
SCT1253WR-SF-09P	10.00	16.20
SCT1253WR-SF-10P	11.25	17.45
SCT1253WR-SF-11P	12.50	18.70
SCT1253WR-SF-12P	13.75	19.95
SCT1253WR-SF-13P	15.00	21.20
SCT1253WR-SF-14P	16.25	22.45
SCT1253WR-SF-15P	17.50	23.70
SCT1253WR-SF-20P	23.75	29.95
SCT1253WR-SF-25P	30.00	36.20
SCT1253WR-SF-30P	36.25	42.45

					OPERATION	DRAW	Judy Luo	05/12/25	SCALE		森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN	Micky	05/12/25	UNIT	mm		
					20 ~ 30 ±0.30	CHECK			SIZE	A4	PART NO.	SCT1253WR-SF-XP
					30 ~ ±0.50	APPROVE			SHEET	1/1	TITLE:	DF14 1.25 SMT 90C WF
0	05/12/27	NEW			Angle ± 2'				PROJ.	◆	DRAWING NO.	SCT1253WR-SF
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							