
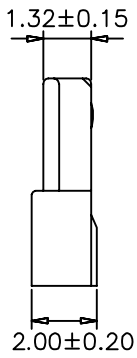
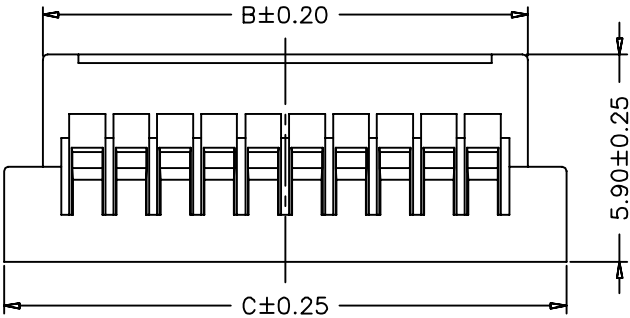


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

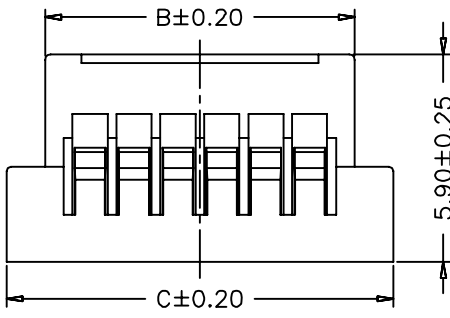

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
SCT1255H-2P	1.25	3.80	6.00
SCT1255H-3P	2.50	5.05	7.25
SCT1255H-4P	3.75	6.30	8.50
SCT1255H-5P	5.00	7.55	9.75
SCT1255H-6P	6.25	8.80	11.00
SCT1255H-8P	8.75	11.30	13.50
SCT1255H-10P	11.25	13.80	16.00
SCT1255H-15P	17.50	20.05	22.25
SCT1255H-20P	23.75	26.30	28.50
SCT1255H-25P	30.00	32.55	34.75
SCT1255H-30P	36.25	38.80	41.00

2P~6P

8P~30P

					OPERATION	DRAW		SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN		UNIT	mm		
					20 ~ 30 ±0.30	CHECK		SIZE	A4	PART NO.	SCT1255H-XX
0	05/12/27				30 ~ ±0.50	APPROVE		SHEET	1/1	TITLE:	JAE1.25(FI-S) HSG
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL			PROJ.	↻	DRAWING NO.	SCT1255H