
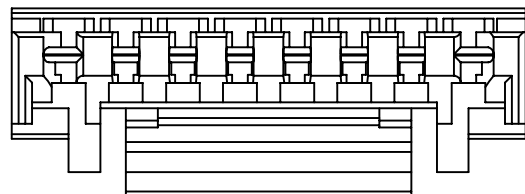
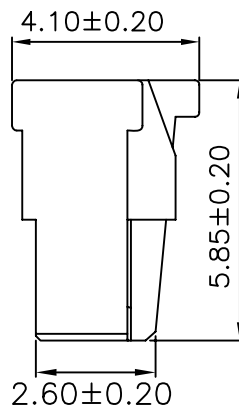
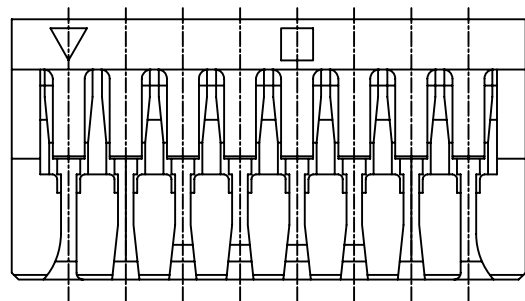


A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G

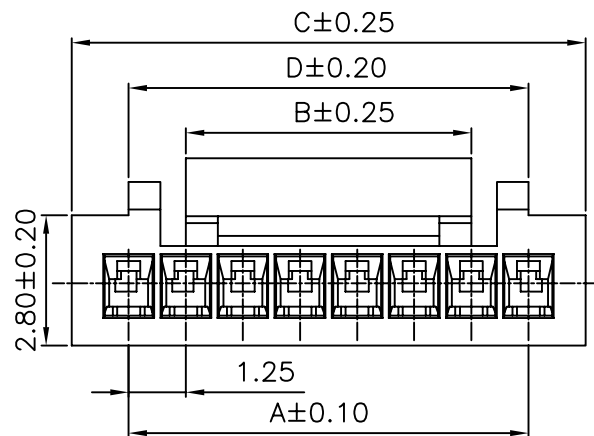

SPECIFICATIONS

Voltage rating: 150V AC, DC  
 Current rating: 1A, AC, DC (AWG#28)  
 Withstanding voltage: 500V AC/minute  
 Insulation resistance: 100MΩ min  
 Temperature range: -40°C - +85°C  
 Contact resistance: 20mΩ max

HOUSING

Part No. :SCT1258H-XX  
 Poles:2-15  
 Material:Nylon 66 UL94V-0  
 Q' TY: 1,000 pcs/bag

PART NO	DIMENSION			
	A	B	C	D
SCT1258H-02	1.25	2.20	3.75	--
SCT1258H-03	2.50	3.20	5.00	--
SCT1258H-04	3.75	4.25	6.25	--
SCT1258H-05	5.00	4.25	7.50	--
SCT1258H-06	6.25	6.25	8.75	--
SCT1258H-07	7.50	6.25	10.00	--
SCT1258H-08	8.75	6.25	11.25	8.75
SCT1258H-09	10.00	6.25	12.50	10.00
SCT1258H-10	11.25	8.20	13.75	11.25
SCT1258H-11	12.50	8.20	15.00	12.50
SCT1258H-12	13.75	8.20	16.25	13.75
SCT1258H-13	15.00	8.20	17.50	15.00
SCT1258H-14	16.25	8.20	18.75	16.25
SCT1258H-15	17.50	8.20	20.00	17.50

					OPERATION	DRAW	Judy.Huang	2014/09/23	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2014/09/23	SIZE	A4		
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	Hellen.Li	2014/09/23	SHEET	1/1		
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	◆	PART NO.	SCT1258H-XXP
					Angle ± 2'						TITLE:	GH1.25 HOUSING
					DIM TOL						DRAWING NO.	SCT1258H-XXP