

1 2 3 4 5 6 7 8 9 10

A

B

C





D

E

F

G

H

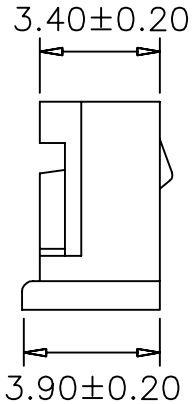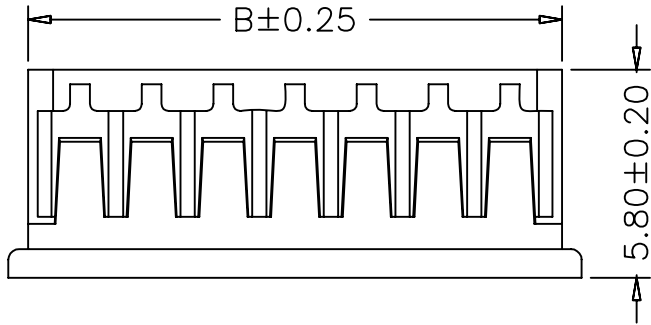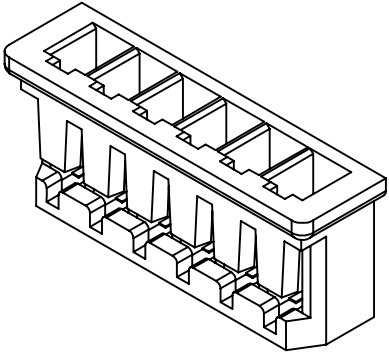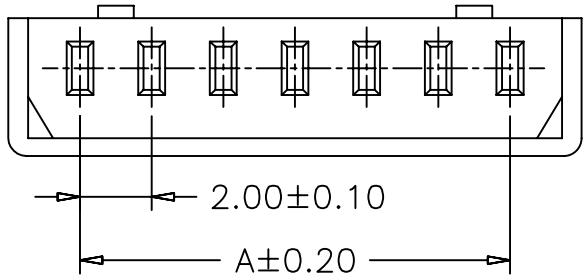

SPECIFICATIONS

Voltage Rating: 125V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2002H-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT2002H-2P	2.00	4.90
SCT2002H-3P	4.00	6.90
SCT2002H-4P	6.00	8.90
SCT2002H-5P	8.00	10.90
SCT2002H-6P	10.00	12.90
SCT2002H-7P	12.00	14.90
SCT2002H-8P	14.00	16.90
SCT2002H-9P	16.00	18.90
SCT2002H-10P	18.00	20.90
SCT2002H-11P	20.00	22.90
SCT2002H-12P	22.00	24.90
SCT2002H-13P	24.00	26.90
SCT2002H-14P	26.00	28.90
SCT2002H-15P	28.00	30.90

					OPERATION	DRAW	Judy.Huang	2014/09/26	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2014/09/26	SIZE	A4	PART NO.	SCT2002H-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	Hellen.Li	2014/09/26	SHEET	1/1	TITLE:	Molex51004 2.0mm Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'	DIM	TOL	PROJ.	◆	DRAWING NO.	SCT2002	

1 2 3 4 5 6 7 8 9 10