



1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G


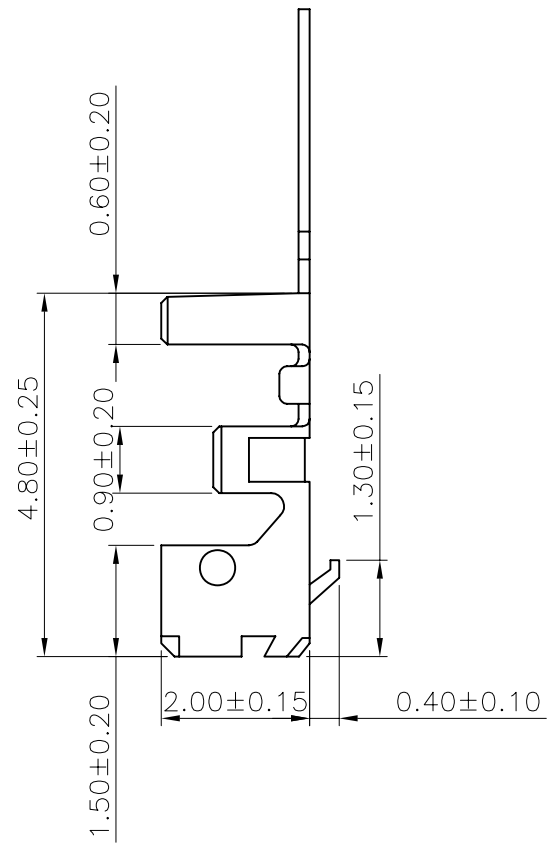


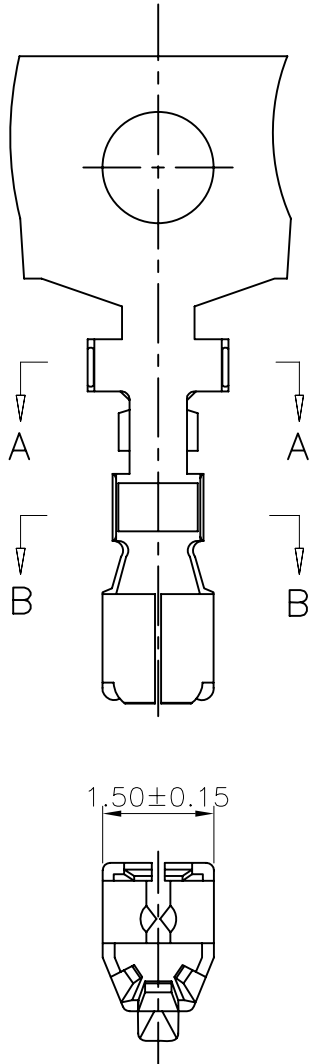

**SPECIFICATIONS**

Voltage Rating: 125V AC/DC  
 Current Rating: 2A AC/DC  
 Withstanding Voltage: 800V AC/minute  
 Insulation Resistance: 1,000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**TERMINAL**

Part No: SCT2002T  
 Wire Range: AWG#24-#28 (OD1.4mm)  
 Material: Phos. Bronze  
 Finish: Tin Plated  
 Thickness: 0.15mm  
 Q`TY: 10,000PCS/Reel



						OPERATION	DRAW	Judy.Huang	2014/09/25	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky.Liu	2014/09/25	SIZE	A4	PART NO.	SCT2002T
						30 ~ ±0.50	APPROVE	Hellen.Li	2014/09/25	SHEET	1/1	TITLE:	Molex51004 2.0mm Terminal
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM				PROJ.		DRAWING NO.	SCT2002T

1 2 3 4 5 6 7 8 9 10