
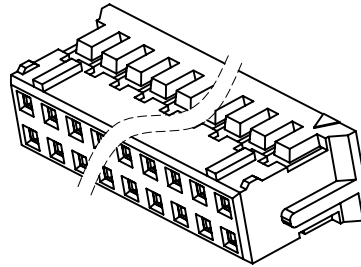


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

A
B
C
D
E
F
G



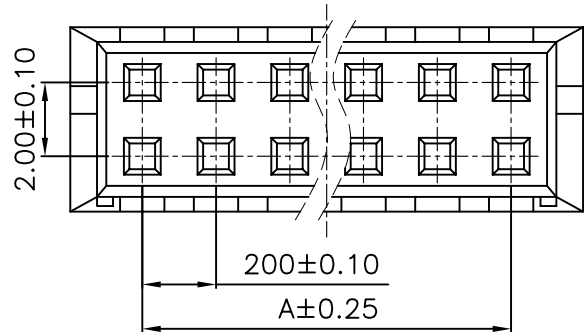


SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2004H-2xXXP
 Poles: 2x2-17
 Material: Nylon 66, UL94V-2

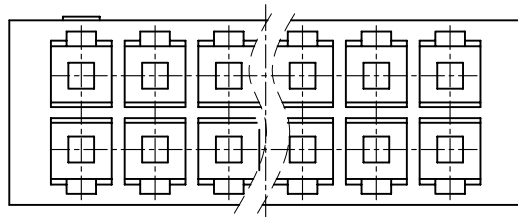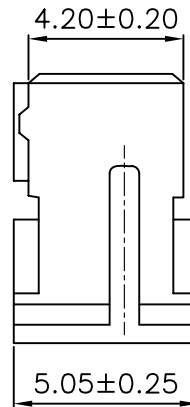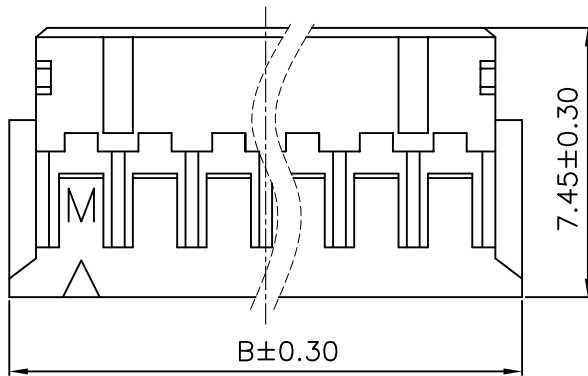

PART NO.	Dimensions	
	B	A
SCT2004H-2X2P	6.00	2.00
SCT2004H-2X3P	8.00	4.00
SCT2004H-2X4P	10.00	6.00
SCT2004H-2X5P	12.00	8.00
SCT2004H-2X6P	14.00	10.00
SCT2004H-2X7P	16.00	12.00
SCT2004H-2X8P	18.00	14.00
SCT2004H-2X9P	20.00	16.00
SCT2004H-2X10P	22.00	18.00
SCT2004H-2X11P	24.00	20.00
SCT2004H-2X12P	26.00	22.00
SCT2004H-2X13P	28.00	24.00
SCT2004H-2X14P	30.00	26.00
SCT2004H-2X15P	32.00	28.00
SCT2004H-2X16P	34.00	30.00
SCT2004H-2X17P	36.00	32.00

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
					~ 10 ±0.15	DESIGN			UNIT	mm			
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4		PART NO.	SCT2004H-2xXXP
0	05/12/27				30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1		TITLE:	PHD2.0 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	Hellen.Li	2006/05/02	PROJ.	↻	DRAWING NO.	SCT2004	

1 2 3 4 5 6 7 8 9 10