


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

A
B
C
D
E
F
G

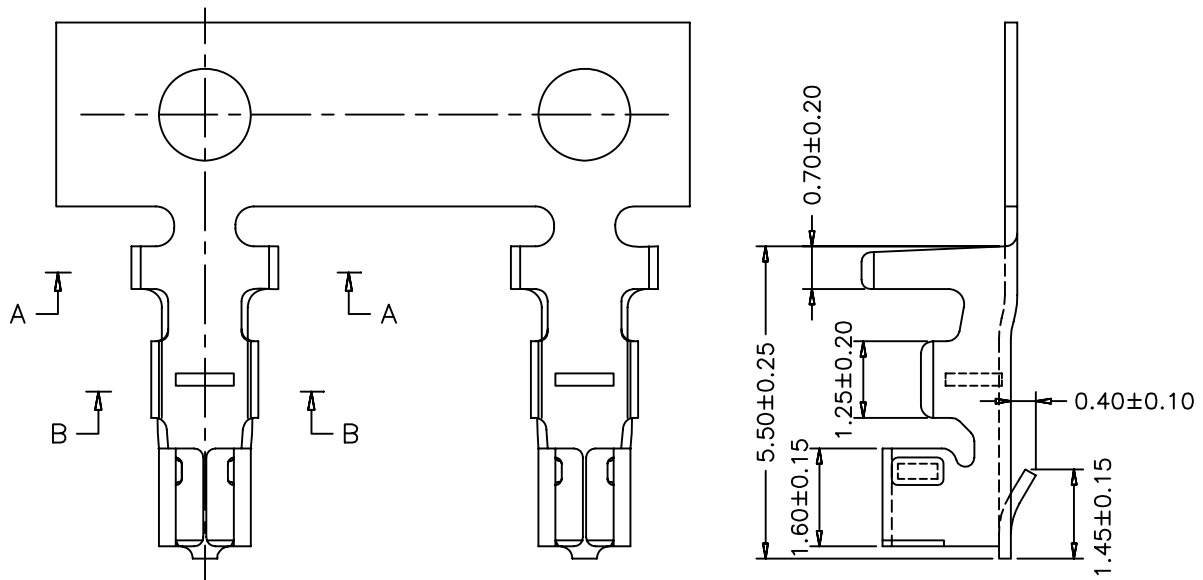



SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2005T
 Wire Range: AWG#24-#28 (OD1.5mm)
 Material: Phos. Bronze
 Finish: Tin Plated
 Thickness: 0.2mm
 Q`TY: 10,000PCS/Reel

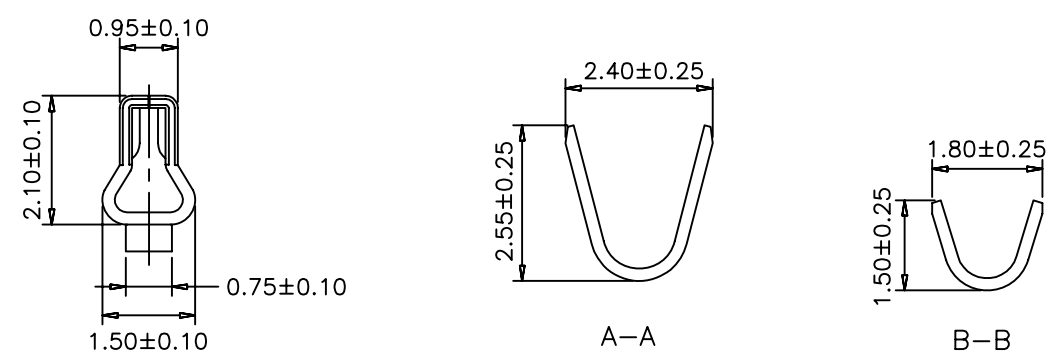

						OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10	DESIGN			UNIT	mm		
						20 ~ 30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT2005T
						30 ~	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	JAE2.0 TERMINAL
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle DIM				PROJ.	◆ ←	DRAWING NO.	SCT2005T

1 2 3 4 5 6 7 8 9 10

H

H