


Recommended P.C.B Layout(Top Side)
(Tolerance=±0.05)

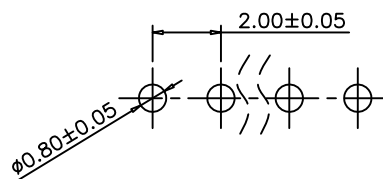

SPECIFICATIONS

Voltage Rating: 100V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2005WV-XXP
 Poles: 2-16
 Material: PA 66, UL94V-0

PART NO	DIMENSION	
	A	B
SCT2005WV-02	2.00	6.00
SCT2005WV-03	4.00	8.00
SCT2005WV-04	6.00	10.00
SCT2005WV-05	8.00	12.00
SCT2005WV-06	10.00	14.00
SCT2005WV-07	12.00	16.00
SCT2005WV-08	14.00	18.00
SCT2005WV-09	16.00	20.00
SCT2005WV-10	18.00	22.00
SCT2005WV-11	20.00	24.00
SCT2005WV-12	22.00	26.00
SCT2005WV-13	24.00	28.00
SCT2005WV-14	26.00	30.00
SCT2005WV-15	28.00	32.00
SCT2005WV-16	30.00	34.00

					OPERATION	DRAW	YANG	2015.12.08	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2015.12.08	SIZE	A4	PART NO.	SCT2005WV-XXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	Allen	2015.12.08	SHEET	1/1	TITLE:	JAE2.0 180C WAFER
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	DRAWING NO.		SCT2005WV