

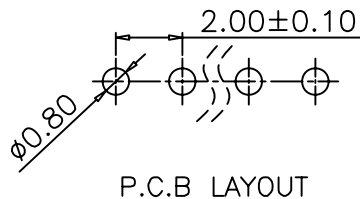


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H


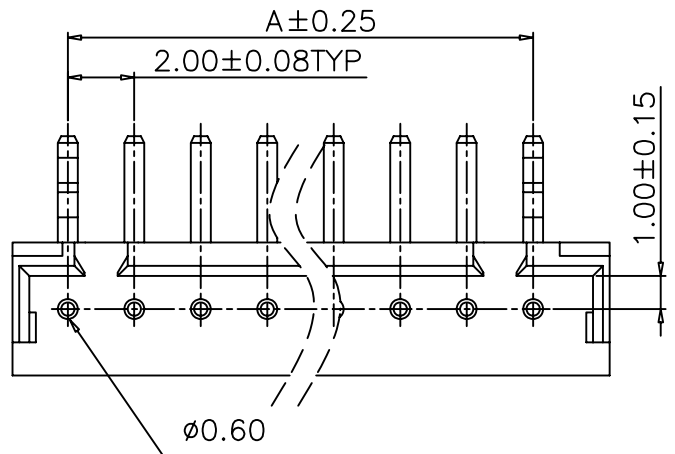


SPECIFICATIONS

Voltage Rating: 100V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2007WR-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin plated

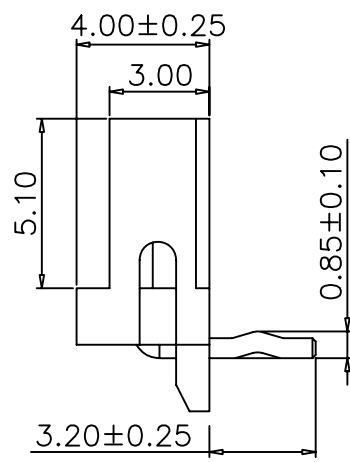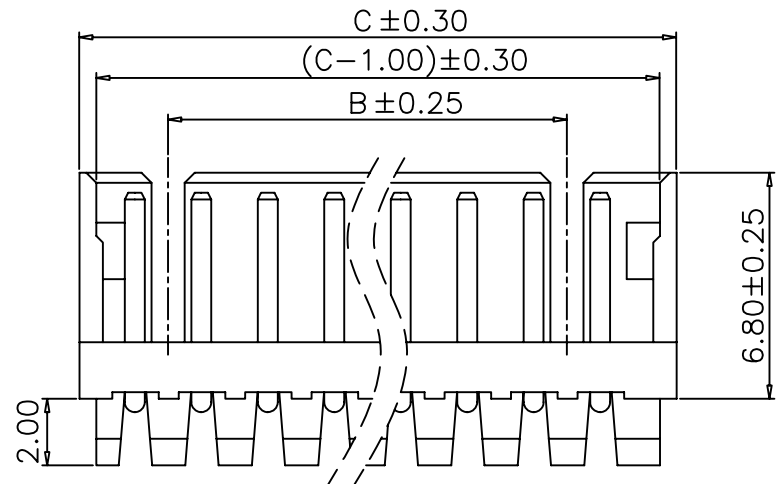

PART NO.	Dimensions		
	A	B	C
SCT2007WR-02P	2.00		5.96
SCT2007WR-03P	4.00		7.96
SCT2007WR-04P	6.00	4.00	9.96
SCT2007WR-05P	8.00	6.00	11.96
SCT2007WR-06P	10.00	8.00	13.96
SCT2007WR-07P	12.00	10.00	15.96
SCT2007WR-08P	14.00	12.00	17.96
SCT2007WR-09P	16.00	14.00	19.96
SCT2007WR-10P	18.00	16.00	21.96
SCT2007WR-11P	20.00	18.00	23.96
SCT2007WR-12P	22.00	20.00	25.96
SCT2007WR-13P	24.00	22.00	27.96
SCT2007WR-14P	26.00	24.00	29.96
SCT2007WR-15P	28.00	26.00	31.96

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ± 0.15	DESIGN			UNIT	mm		
					20 ~ 30 ± 0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT2007WR-XXP
					30 ~ ± 0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	AMP2.0 90C WAFER
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'	DIM TOL			PROJ.	↺	DRAWING NO.	SCT2007

1 2 3 4 5 6 7 8 9 10