



1 2 3 4 5 6 7 8 9 10

A





SPECIFICATIONS

Voltage Rating: 100V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

B

C

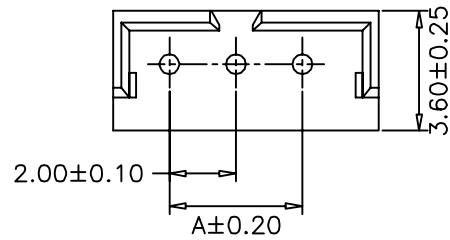



P.C.B LAYOUT

HOUSING

Part No: SCT2007WV-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin plated

D

E

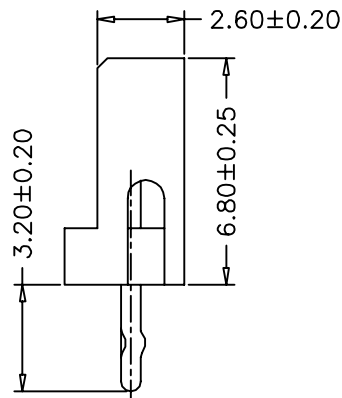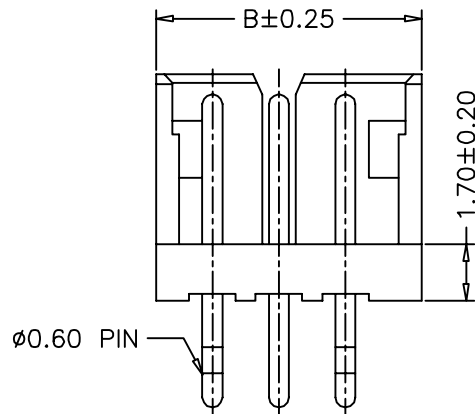

PART NO.	Dimensions	
	A	B
SCT2007WV-02P	2.00	5.96
SCT2007WV-03P	4.00	7.96
SCT2007WV-04P	6.00	9.96
SCT2007WV-05P	8.00	11.96
SCT2007WV-06P	10.00	13.96
SCT2007WV-07P	12.00	15.96
SCT2007WV-08P	14.00	17.96
SCT2007WV-09P	16.00	19.96
SCT2007WV-10P	18.00	21.96
SCT2007WV-11P	20.00	23.96
SCT2007WV-12P	22.00	25.96
SCT2007WV-13P	24.00	27.96
SCT2007WV-14P	26.00	29.96
SCT2007WV-15P	28.00	31.96

H

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
					~ 10	±0.15			UNIT	mm			
					20 ~ 30	±0.30			SIZE	A4	PART NO.	SCT2007WV-XXP	
0	05/12/27				30 ~	±0.50	CHECK	Micky.Liu	2006/05/02	SHEET	1/1	TITLE:	AMP2.0 180C WAFER
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 2'	APPROVE	Hellen.Li	2006/05/02	PROJ.	◆	DRAWING NO.	SCT2007
					DIM	TOL							

1 2 3 4 5 6 7 8 9 10