

1 2 3 4 5 6 7 8 9 10

A

B



C

D

E

F

G

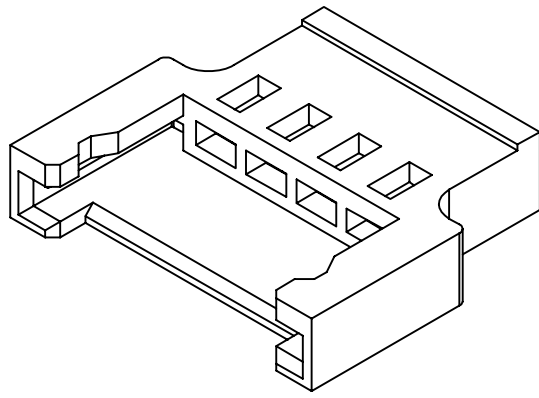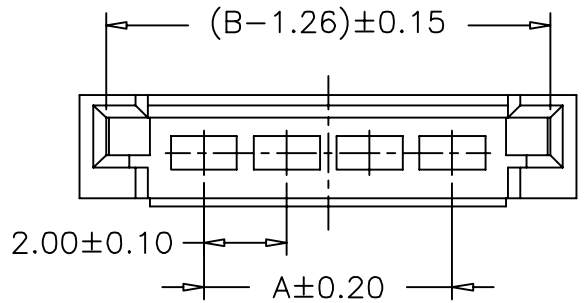


SPECIFICATIONS

Voltage Rating: 125V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2008FH-XXP
 Poles: 2-13
 Material: Nylon 66, UL94V-0
 Q'TY: 500, 1000 pcs/bag

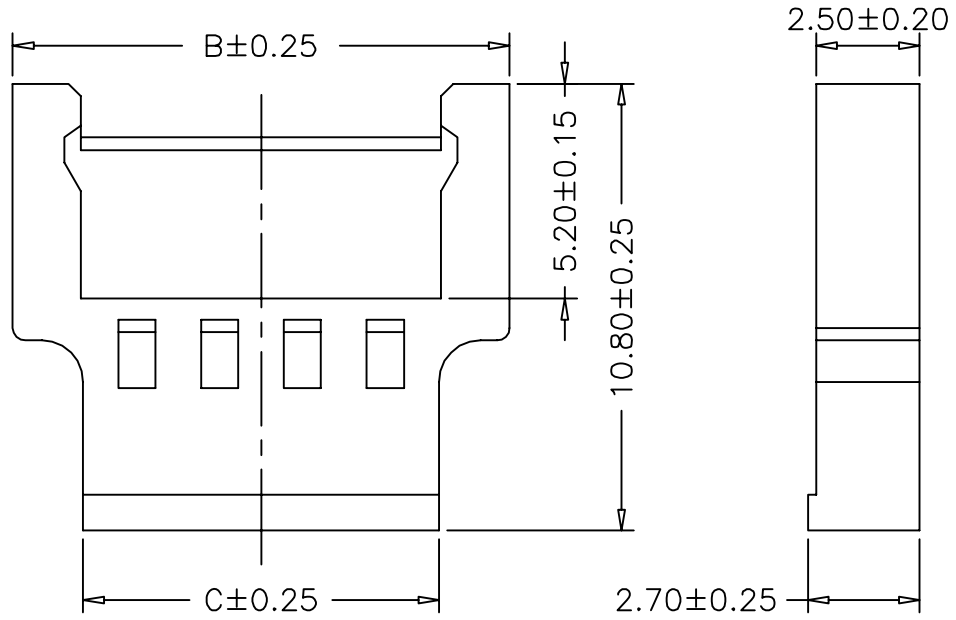

PART NO.	Dimensions		
	A	B	C
SCT2008FH-02P	2.00	8.00	4.60
SCT2008FH-03P	4.00	10.00	6.60
SCT2008FH-04P	6.00	12.00	8.60
SCT2008FH-05P	8.00	14.00	10.60
SCT2008FH-06P	10.00	16.00	12.60
SCT2008FH-07P	12.00	18.00	14.60
SCT2008FH-08P	14.00	20.00	16.60
SCT2008FH-09P	16.00	22.00	18.60
SCT2008FH-10P	18.00	24.00	20.60
SCT2008FH-11P	20.00	26.00	22.60
SCT2008FH-13P	24.00	30.00	26.60

H

A

B

C

D

E

F

G

H

					OPERATION	DRAW	Judy.Huang	2007/10/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2007/10/02	SIZE	A4	PART NO.	SCT2008FH-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	Hellen.Li	2007/10/02	SHEET	1/1	TITLE:	MX51006 Female Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	Hellen.Li	2007/10/02	PROJ.	◆	DRAWING NO.	SCT2008

1 2 3 4 5 6 7 8 9 10