

1 2 3 4 5 6 7 8 9 10

A

B

C




D

E

F

G

H

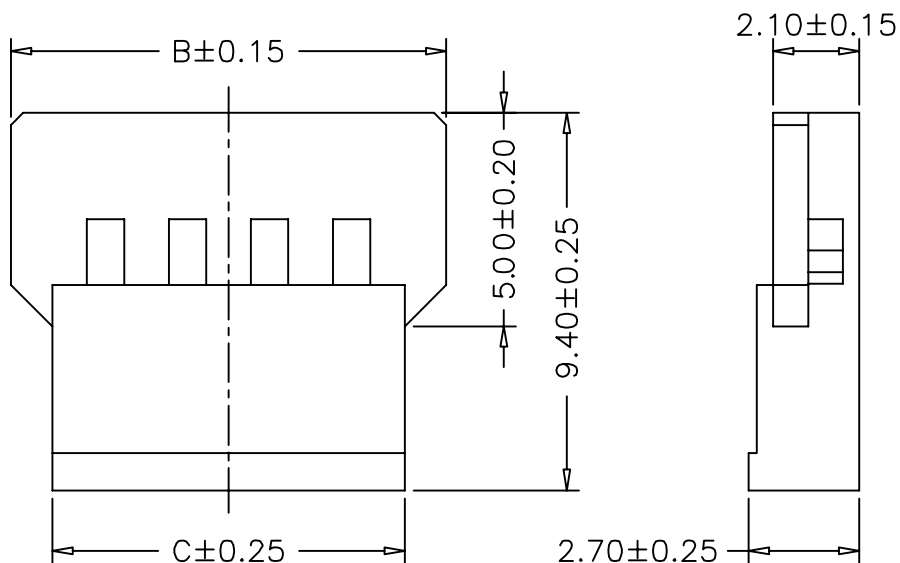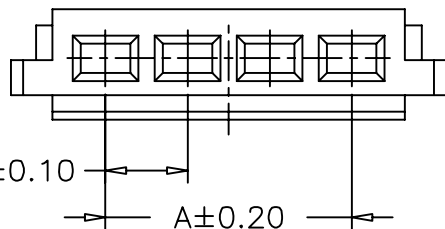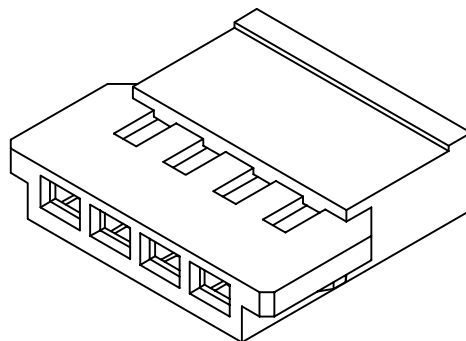

SPECIFICATIONS

Voltage Rating: 125V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2008MH-XXP
 Poles: 2-13
 Material: Nylon 66, UL94V-0

PART NO.	Dimensions		
	A	B	C
SCT2008MH-02P	2.00	6.60	4.60
SCT2008MH-03P	4.00	8.60	6.60
SCT2008MH-04P	6.00	10.60	8.60
SCT2008MH-05P	8.00	12.60	10.60
SCT2008MH-06P	10.00	14.60	12.60
SCT2008MH-07P	12.00	16.60	14.60
SCT2008MH-08P	14.00	18.60	16.60
SCT2008MH-09P	16.00	20.60	18.60
SCT2008MH-10P	18.00	22.60	20.60
SCT2008MH-11P	20.00	24.60	22.60
SCT2008MH-13P	24.00	28.60	26.60

					OPERATION	DRAW	Judy.Huang	2007/10/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2007/10/02	SIZE	A4	PART NO.	SCT2008MH-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	Hellen.Li	2007/10/02	SHEET	1/1	TITLE:	MX51005 MALE HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	PROJ.			DRAWING NO.		SCT2008	

1 2 3 4 5 6 7 8 9 10