



1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G


A
B
C
D
E
F
G

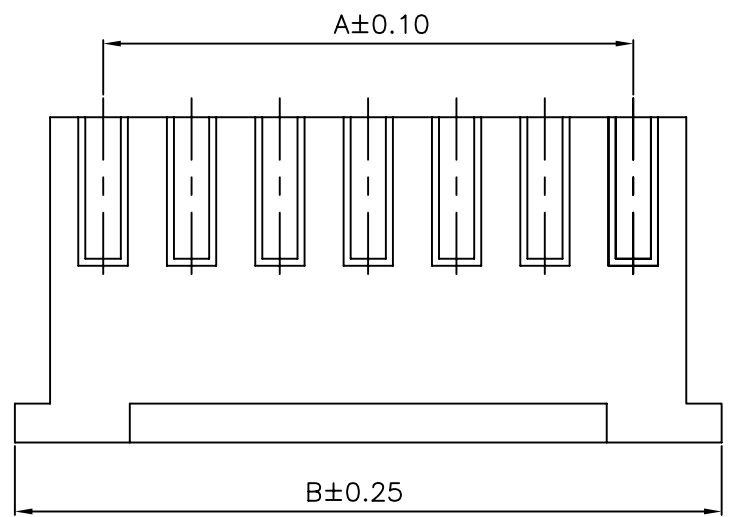


SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT2502H-XXP
 Poles: 2-16
 Material: Nylon 66, UL94V-2

PART NO	DIMENSION	
	A	B
SCT2502H-02	2.50	7.50
SCT2502H-03	5.00	10.00
SCT2502H-04	7.50	12.50
SCT2502H-05	10.00	15.00
SCT2502H-06	12.50	17.50
SCT2502H-07	15.00	20.00
SCT2502H-08	17.50	22.50
SCT2502H-09	20.00	25.00
SCT2502H-10	22.50	27.50
SCT2502H-11	25.00	30.00
SCT2502H-12	27.50	32.50
SCT2502H-13	30.00	35.00
SCT2502H-14	32.50	37.50
SCT2502H-15	35.00	40.00
SCT2502H-16	37.50	42.50

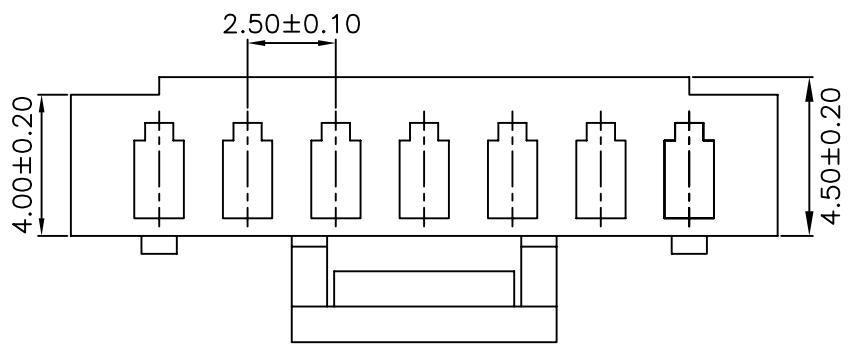

						OPERATION	DRAW	CHENA	05/12/27	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	05/12/28	SIZE	A4	PART NO.	SCT2502H-XXP
						30 ~ ±0.50	APPROVE	HELLEN	05/12/28	SHEET	1/1	TITLE:	XA2.5 HOUSING
0	05/12/27	NEW				Angle ± 2'				PROJ.	↺	DRAWING NO.	SCT2502
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		DIM TOL							

1 2 3 4 5 6 7 8 9 10

H

H