



1 2 3 4 5 6 7 8 9 10

A

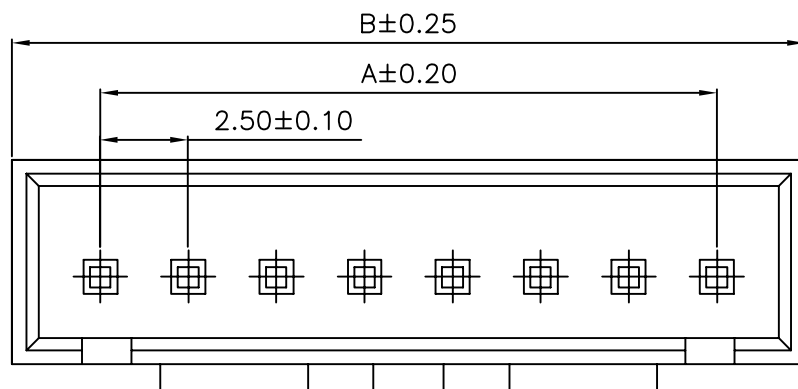


B

C



PCB LAYOUT


D

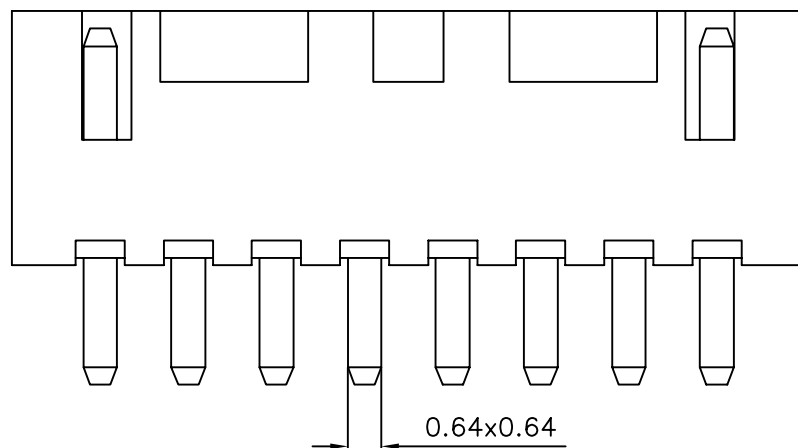

E

F

G

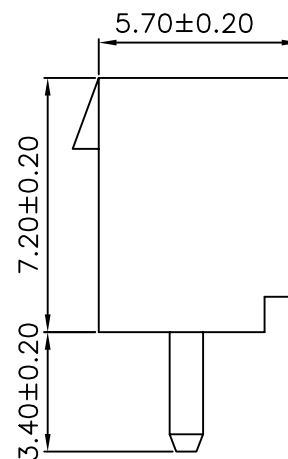

SPECIFICATIONS

Voltage Rating: 250V AC/DC
Current Rating: 3A AC/DC
Withstanding Voltage: 1000V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

WAFER

Part No: SCT2502WV-XXP
Poles: 2-16
Material: Nylon 66, UL94V-2
Pin: Brass, Tin plated

PART NO	DIMENSION	
	A	B
SCT2502WV-02	2.50	7.50
SCT2502WV-03	5.00	10.00
SCT2502WV-04	7.50	12.50
SCT2502WV-05	10.00	15.00
SCT2502WV-06	12.50	17.50
SCT2502WV-07	15.00	20.00
SCT2502WV-08	17.50	22.50
SCT2502WV-09	20.00	25.00
SCT2502WV-10	22.50	27.50
SCT2502WV-11	25.00	30.00
SCT2502WV-12	27.50	32.50
SCT2502WV-13	30.00	35.00
SCT2502WV-14	32.50	37.50
SCT2502WV-15	35.00	40.00
SCT2502WV-16	37.50	42.50

H

					OPERATION		DRAW	CHENA	05/12/27	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10	±0.15	DESIGN			UNIT	mm		
					20 ~ 30	±0.30		CHECK	MICKY	05/12/28	SIZE	A4	PART NO.
0	05/12/27	NEW		_____	30 ~	±0.50	APPROVE		HELLEN	05/12/28	SHEET	1/1	TITLE:
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM TOL					PROJ.		DRAWING NO.

1 2 3 4 5 6 7 8 9 10