

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E

F

G

H

A

B

C





D

E


F

G

H

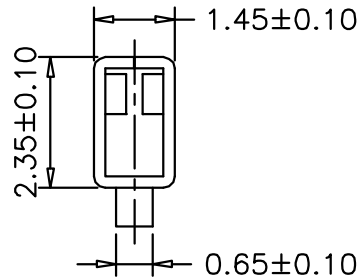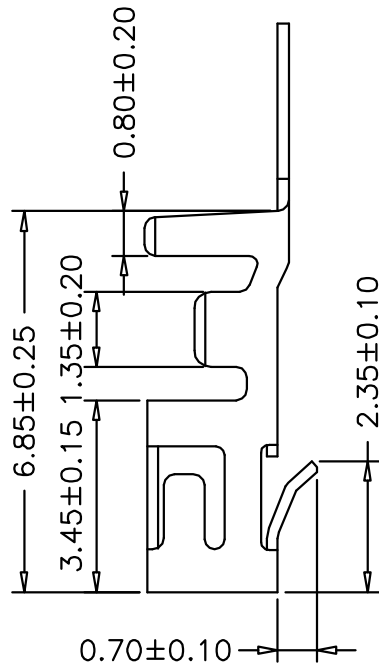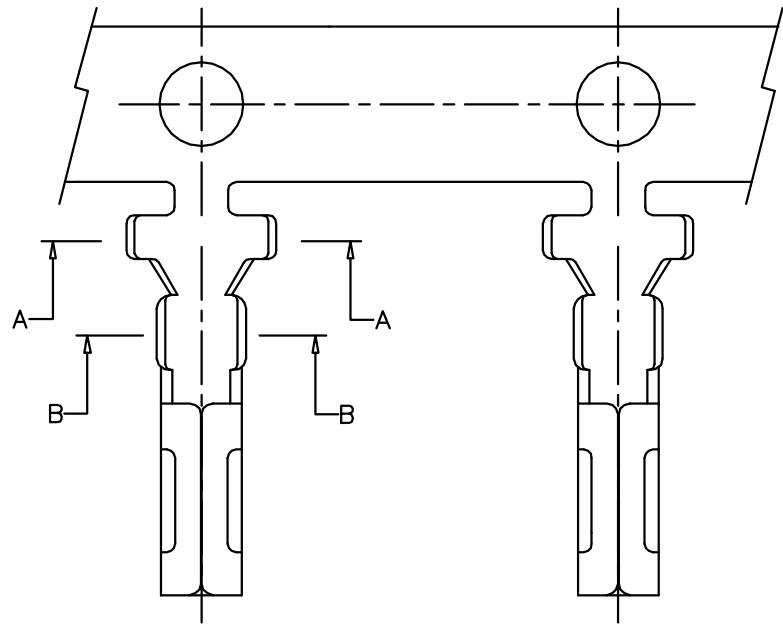

A-A




B-B

SPECIFICATIONS

Voltage Rating: 250V AC/DC  
 Current Rating: 3A AC/DC  
 Withstanding Voltage: 800V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

TERMINAL

Part No: SCT2503T  
 Wire Range: AWG#22-#28 (OD1.9mm)  
 Material: Brass  
 Finish: Tin Plated  
 Thickness: 0.2mm  
 QTY: 8,000PCS/Reel

						OPERATION	DRAW	CHENA	05/12/27	SCALE		 森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	05/12/28	SIZE	A4	PART NO.	SCT2503T
						30 ~ ±0.50	APPROVE	HELLEN	05/12/28	SHEET	1/1	TITLE:	Dupont2.5 TERMINAL
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM				PROJ.	◆	DRAWING NO.	SCT2503

1 2 3 4 5 6 7 8 9 10