

SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max


HOUSING
 Part No: SCT2504H-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-0

PART NO.	Dimensions	
	A	B
SCT2504H-2P	2.50	5.50
SCT2504H-3P	5.00	8.00
SCT2504H-4P	7.50	10.50
SCT2504H-5P	10.00	13.00
SCT2504H-6P	12.50	15.50
SCT2504H-7P	15.00	18.00
SCT2504H-8P	17.50	20.50
SCT2504H-9P	20.00	23.00
SCT2504H-10P	22.50	25.50
SCT2504H-11P	25.00	28.00
SCT2504H-12P	27.50	30.50
SCT2504H-13P	30.00	33.00
SCT2504H-14P	32.50	35.50
SCT2504H-15P	35.00	38.00


2P,3P

4P~6P


7P~15P




A±0.20




2.50±0.10
A±0.20

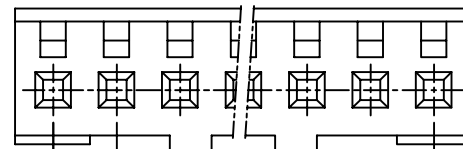


2.50±0.10
A±0.20




B±0.25



B±0.25

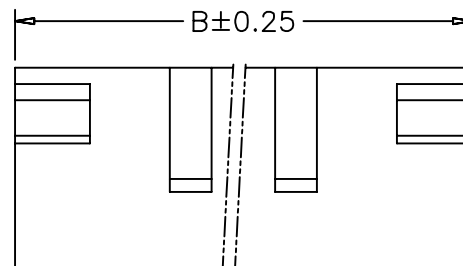

B±0.25

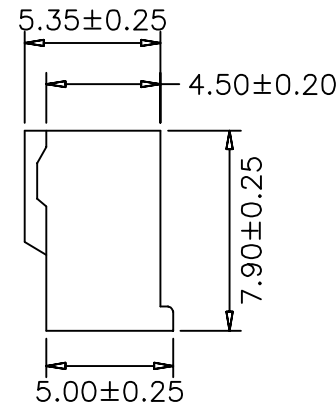

					OPERATION	DRAW	CHENA	2010.12.03	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
					~ 10 ±0.15	DESIGN			UNIT	mm			
					20 ~ 30 ±0.30	CHECK	MICKY	2010.12.03	SIZE	A4		PART NO.	SCT2504H-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	HELLEN	2010.12.03	SHEET	1/1		TITLE:	JAE2.5 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	HELLEN	2010.12.03	PROJ.	◆	DRAWING NO.	SCT2504	