
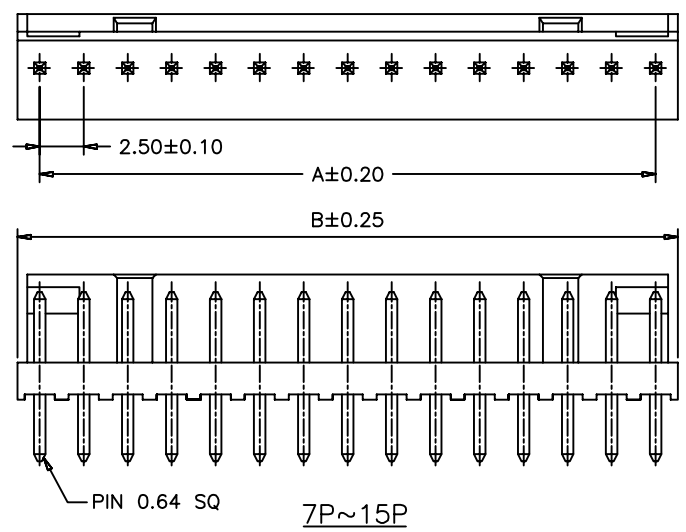


SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1,000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max
HOUSING
 Part No: SCT2504WV-XXP
 Poles: 2-15
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin plated

PART NO.	Dimensions	
	A	B
SCT2504WV-2P	2.50	5.00
SCT2504WV-3P	5.00	7.50
SCT2504WV-4P	7.50	10.00
SCT2504WV-5P	10.00	12.50
SCT2504WV-6P	12.50	15.00
SCT2504WV-7P	15.00	17.50
SCT2504WV-8P	17.50	20.00
SCT2504WV-9P	20.00	22.50
SCT2504WV-10P	22.50	25.00
SCT2504WV-11P	25.00	27.50
SCT2504WV-12P	27.50	30.00
SCT2504WV-13P	30.00	32.50
SCT2504WV-14P	32.50	35.00
SCT2504WV-15P	35.00	37.50



					OPERATION	DRAW	CHENA	2010.12.03	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2010.12.03	SIZE	A4	PART NO.	SCT2504WV-XXP
					30 ~ ±0.50	APPROVE	HELLEN	2010.12.03	SHEET	1/1	TITLE:	JAE2.5 180C WAFER
0	05/12/27		NEW		Angle ± 2'				PROJ.	DRAWING NO.		SCT2504
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	HELLEN	2010.12.03				