


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G


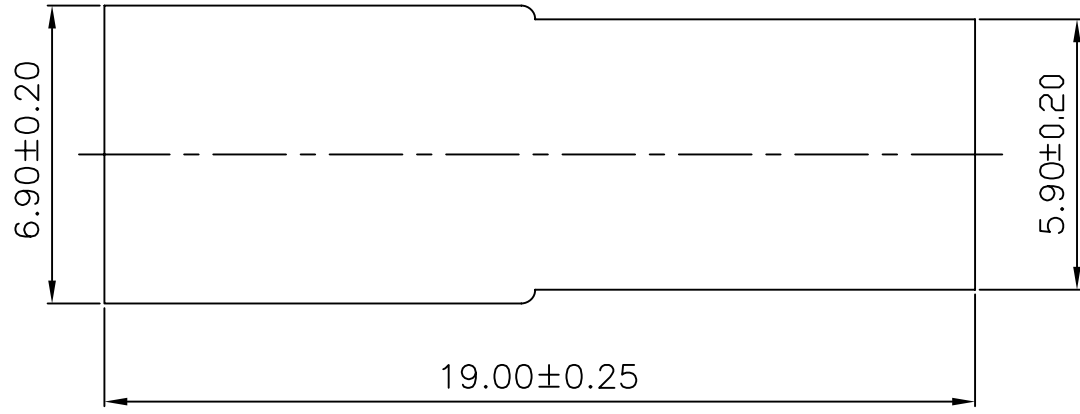


SPECIFICATIONS


Voltage Rating: 250V AC/DC
 Current Rating: 2A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 500MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2507FH-02P
 Poles: 02
 Material: Nylon 66, UL94V-2

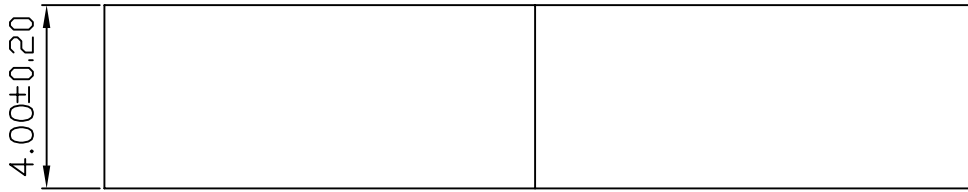

A
B
C
D
E
F
G

						OPERATION	DRAW	CHENA	2010.12.03	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	2010.12.03	SIZE	A4	PART NO.	SCT2507FH-02P
						30 ~ ±0.50	APPROVE	HELLEN	2010.12.03	SHEET	1/1	TITLE:	JST2.5 FEMALE HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle DIM				PROJ.	↻	DRAWING NO.	SCT2507

1 2 3 4 5 6 7 8 9 10