

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 2A AC/DC

Withstanding Voltage: 1000V AC/minute

Insulation Resistance: 500MΩ min.

Temperature Range: -25° C - +85° C



Contact Resistance: 20mΩ max


HOUSING

Part No: SCT2507MH-02P

Poles: 02

Material: Nylon 66, UL94V-2

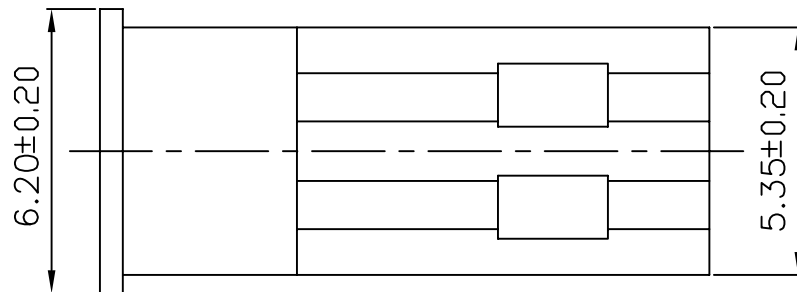

						OPERATION	DRAW	CHENA	2010.12.03	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	2010.12.03	SIZE	A4	PART NO.	SCT2507MH-02P
						30 ~ ±0.50	APPROVE	HELLEN	2010.12.03	SHEET	1/1	TITLE:	JST2.5 MALE HOUSING
0	05/12/27	NEW				Angle ± 2'				PROJ.	↯	DRAWING NO.	SCT2507
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE							