
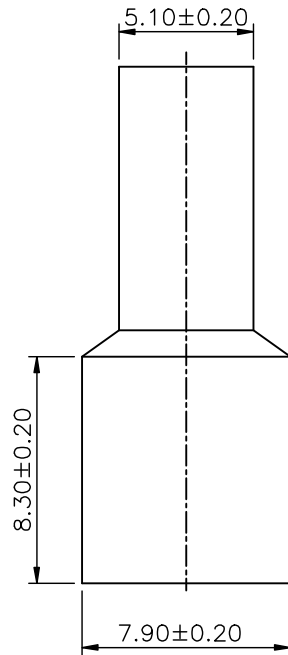
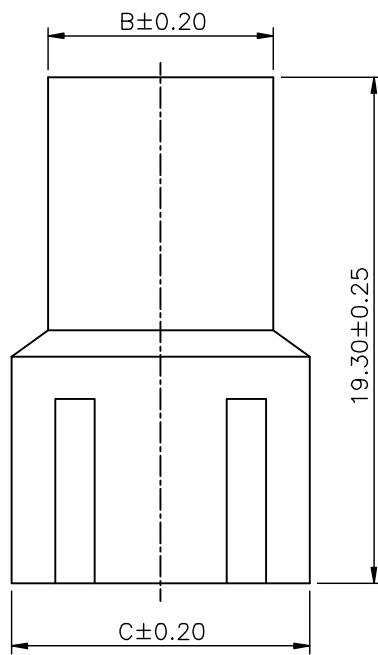


1 2 3 4 5 6 7 8 9 10




SPECIFICATIONS

Voltage Rating:250V AC/DC
 Current Rating:2A AC/DC
 Withstanding Voltage:500V AC/minute
 Insulation Resistance:800MΩ min.
 Temperature Range:-25°C - +85°C
 Contact Resistance:20mΩ max

HOUSING

Part No: SCT2508FH-XXP
 Poles:2-4
 Material:Nylon 66,UL94V-2

PART NO	DIMENSION		
	A	B	C
SCT2508FH-02	2.50	5.90	8.70
SCT2508FH-03	5.00	8.40	11.20
SCT2508FH-04	7.50	10.80	13.70

					OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT2508FH-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	Molex 5240 HOUSING
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE			PROJ.	↺	DRAWING NO.	SCT2508

1 2 3 4 5 6 7 8 9 10