

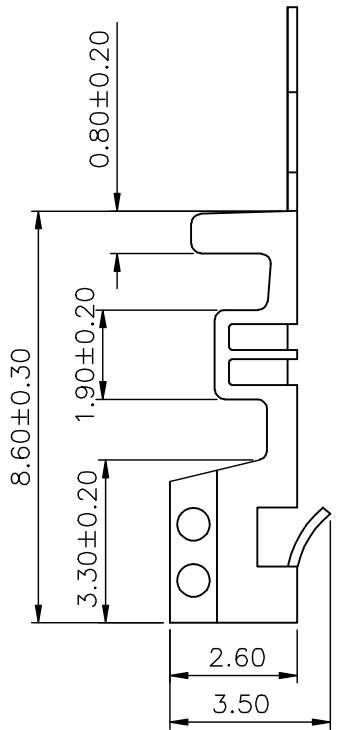


1 2 3 4 5 6 7 8 9 10

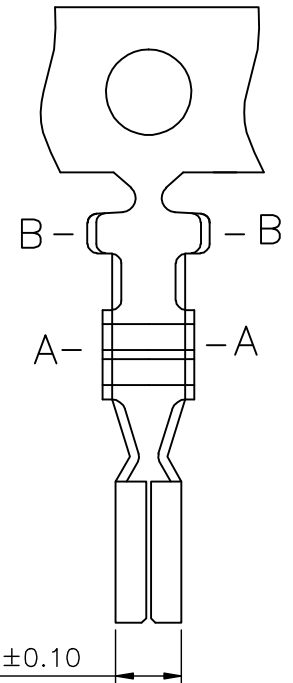

SPECIFICATIONS
 Voltage Rating:250V AC/DC
 Current Rating:2A AC/DC
 Withstanding Voltage:500V AC/minute
 Insulation Resistance:800MΩ min.
 Temperature Range:-25°C - +85°C
 Contact Resistance:20mΩ max

TERMINAL
 Part No:SCT2508FT
 Wire Range:AWG#22-#28(OD1.80mm)
 Material:Brass
 Finish:Tin Plated
 Thickness:0.2mm
 Q'TY:7,000PCS/Reel

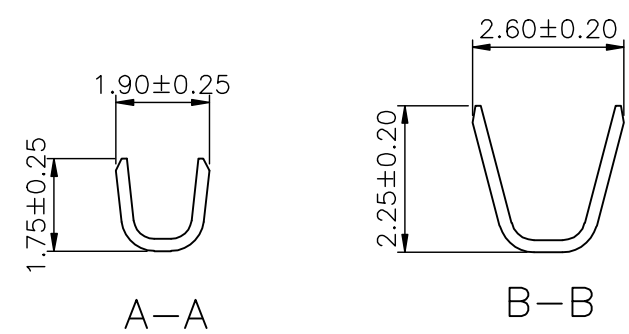

						OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10	DESIGN			UNIT	mm		
						20 ~ 30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT2508FT
0	05/12/27	NEW				30 ~	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	Molex 5102 TERMINAL
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE				PROJ.	◆ ⇐	DRAWING NO.	SCT2508

1 2 3 4 5 6 7 8 9 10