
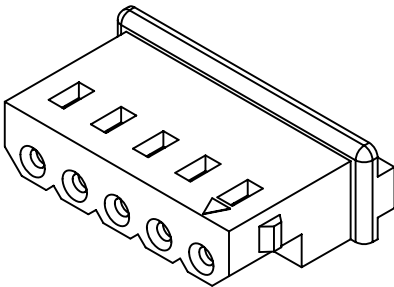


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G


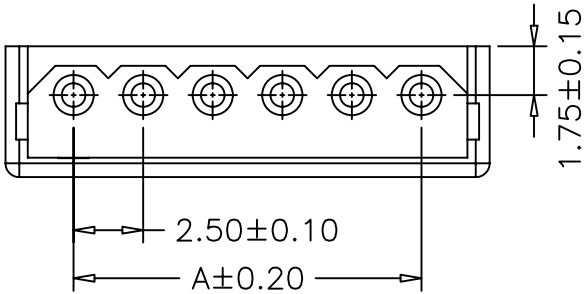


**SPECIFICATIONS**

Voltage Rating: 250V AC/DC  
 Current Rating: 3A AC/DC  
 Withstanding Voltage: 1000V AC/minute  
 Insulation Resistance: 1,000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**

Part No: SCT2513H-XXP  
 Poles: 2-16  
 Material: Nylon 66, UL94V-0

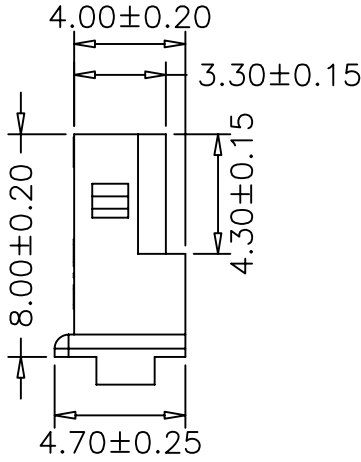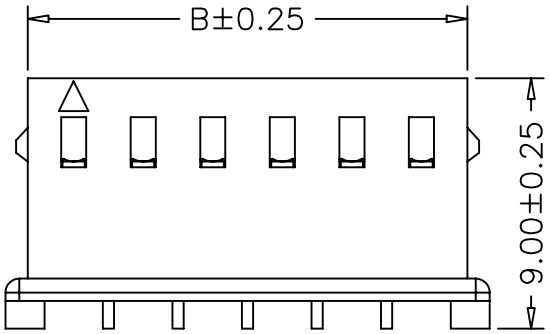

PART NO.	Dimensions	
	A	B
SCT2513H-02P	2.50	5.80
SCT2513H-03P	5.00	8.30
SCT2513H-04P	7.50	10.80
SCT2513H-05P	10.00	13.30
SCT2513H-06P	12.50	15.80
SCT2513H-07P	15.00	18.30
SCT2513H-08P	17.50	20.80
SCT2513H-09P	20.00	23.30
SCT2513H-10P	22.50	25.80
SCT2513H-11P	25.00	28.30
SCT2513H-12P	27.50	30.80
SCT2513H-13P	30.00	33.30
SCT2513H-14P	32.50	35.80
SCT2513H-15P	35.00	38.30
SCT2513H-16P	37.50	40.80

						OPERATION	DRAW	CHENA	2010.12.03	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED		
						~ 10 ±0.15	DESIGN			UNIT	mm			
						20 ~ 30 ±0.30	CHECK	MICKY	2010.12.03	SIZE	A4		PART NO.	SCT2513H-XXP
						30 ~ ±0.50	APPROVE	HELLEN	2010.12.03	SHEET	1/1		TITLE:	MOLEX2.5 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 2° DIM TOL				PROJ.	◆		DRAWING NO.	SCT2513

1 2 3 4 5 6 7 8 9 10