


1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G


A  
B  
C  
D  
E  
F  
G

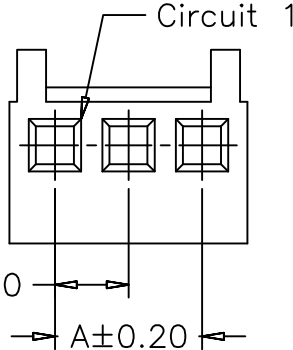

2.54±0.10


A±0.20

B±0.25

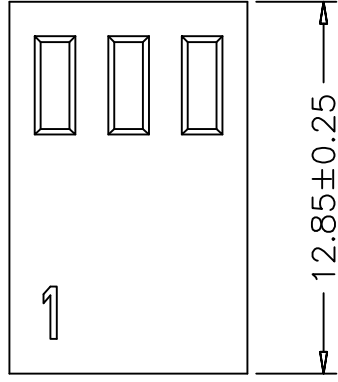


12.85±0.25

6.70±0.25

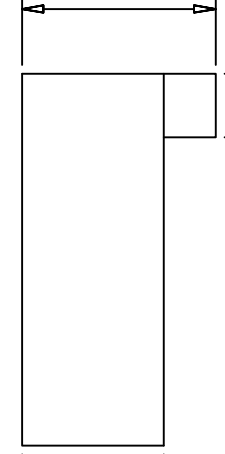

4.90±0.25

2.30±0.20

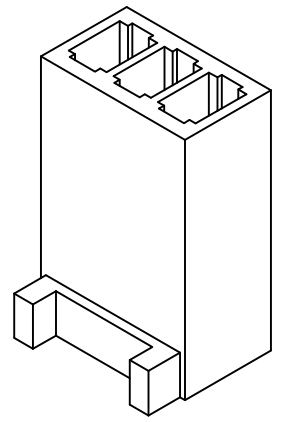

SPECIFICATIONS

Voltage Rating: 250V AC/DC  
 Current Rating: 4A AC/DC  
 Withstanding Voltage: 1000V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2541HA-XXP  
 Poles: 2-5  
 Material: Nylon 66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT2541HA-02P	2.54	5.62
SCT2541HA-03P	5.08	8.16
SCT2541HA-04P	7.62	10.70
SCT2541HA-05P	10.16	13.24

					OPERATION	DRAW	YANG	2016.05.12	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2016.05.12	SIZE	A4	PART NO.	SCT2541HA-XXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	ALLEN	2016.05.12	SHEET	1/1	TITLE:	MX2.54 HOUSING
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	◆	DRAWING NO.	SCT2541

1 2 3 4 5 6 7 8 9 10