
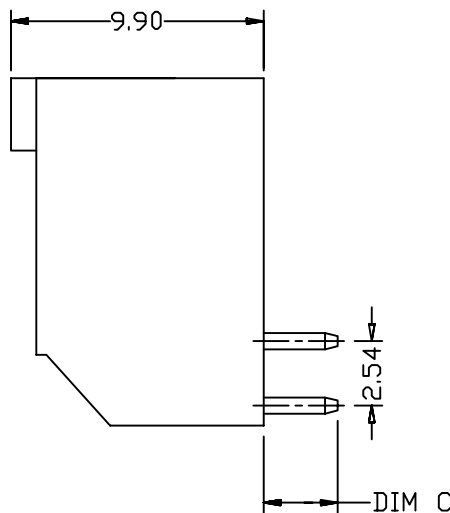


**SPECIFICATIONS**

Voltage Rating: 250V AC/DC  
 Current Rating: 3A AC/DC  
 Withstanding Voltage: 1000V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**

Part No: SCT25441WRA-2xXXP  
 Poles: 2x3-20  
 Material: PBT 94V-0  
 Pin Material: Brass/Gold-flash or Tin-plated

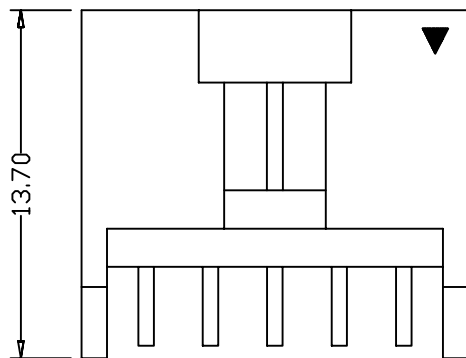

DIM C
2.50mm
2.90mm

PART NO.	Dimensions	
	A	B
SCT2544WRA-2x03P	5.08	10.20
SCT2544WRA-2x04P	7.62	12.70
SCT2544WRA-2x05P	10.16	15.20
SCT2544WRA-2x06P	12.70	17.80
SCT2544WRA-2x19P	45.72	50.80
SCT2544WRA-2x20P	48.26	53.30

						OPERATION	DRAW	Judy.Huang	2006/05/02	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	Micky.Liu	2006/05/02	SIZE	A4	PART NO.	SCT2544WRA-2xXXP
0	05/12/27		NEW			30 ~ ±0.50	APPROVE	Hellen.Li	2006/05/02	SHEET	1/1	TITLE:	MOLEX2.54 WAFER
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	PROJ.					DRAWING NO.	SCT2544WRA-2xXXP