
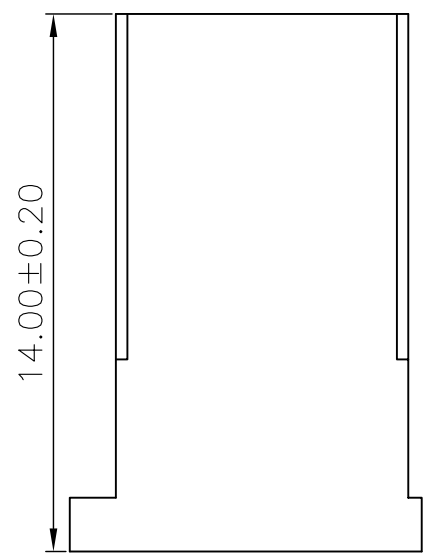
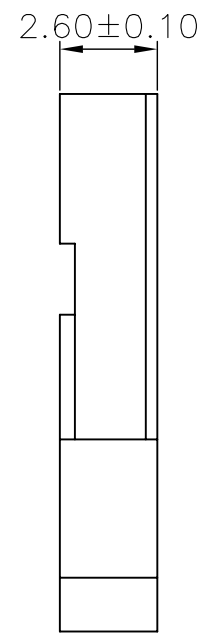
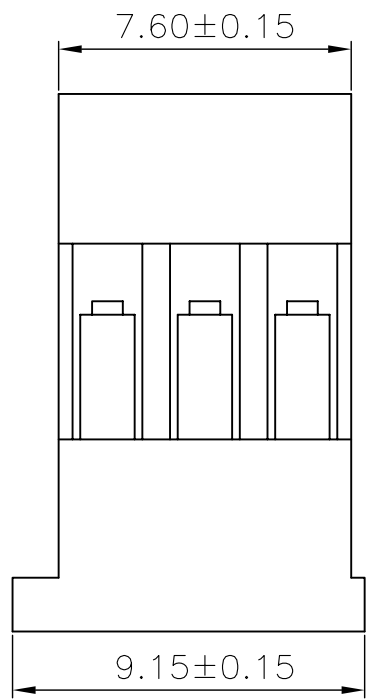


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G



SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 3A AC/DC

Withstanding Voltage: 1000V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C


Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2546H3-03P

Material: PA66, UL94V-2

A
B
C
D
E
F
G

						OPERATION	DRAW	CHENA	2014.09.05	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30		CHECK	MICKY	2014.09.05	SIZE	A4	PART NO.
0	05/12/27		NEW			30 ~ ±0.50	APPROVE		HELLEN	2014.09.05	SHEET	1/1	TITLE:
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'					PROJ.	☞	DRAWING NO.

1 2 3 4 5 6 7 8 9 10