
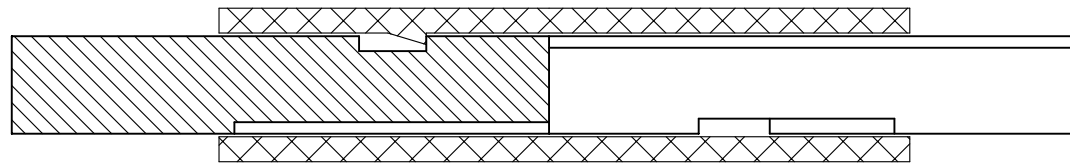
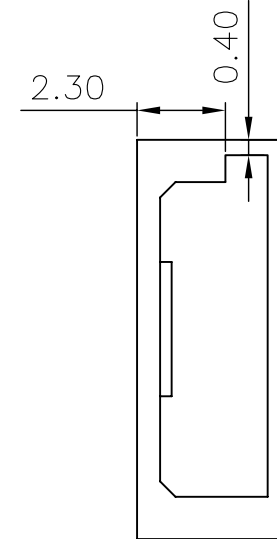
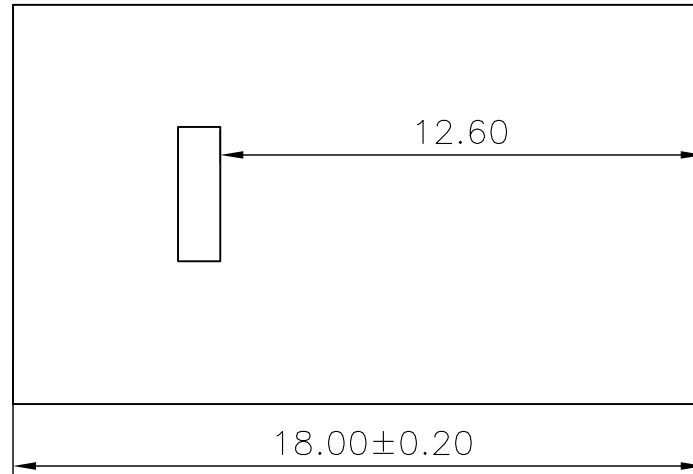


SPECIFICATIONS

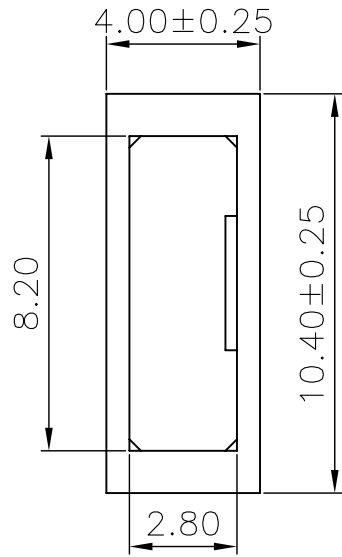

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

HOUSING

Part No: SCT2546H7
 Material: PA66, UL94V-2



ASSEMBLY

					OPERATION	DRAW	SIMON	2015.01.14	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2015.01.14	SIZE	A4	PART NO.	SCT2546H7
					30 ~ ±0.50	APPROVE	HELLEN	2015.01.14	SHEET	1/1	TITLE:	Dupont2.54 H7 Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2' TOL			PROJ.	 DRAWING NO.	SCT2546	