

1 2 3 4 5 6 7 8 9 10

A


SPECIFICATIONS

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max


HOUSING

Part No: SCT2546H8
 Material: PA66, UL94V-2


3.80±0.25

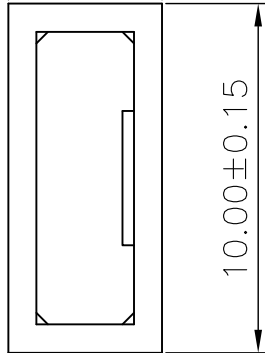

10.00±0.15

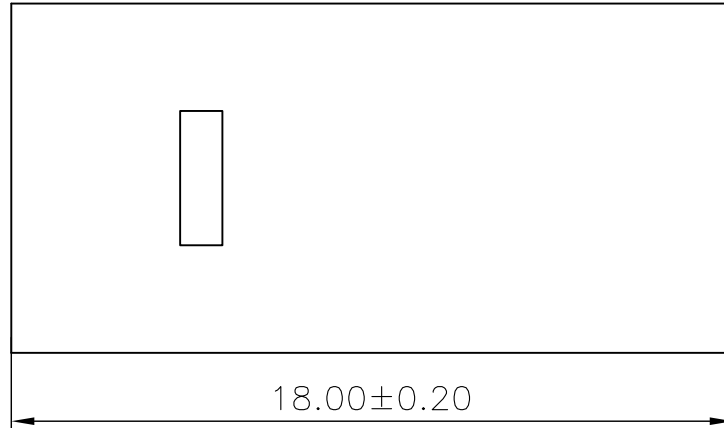

18.00±0.20

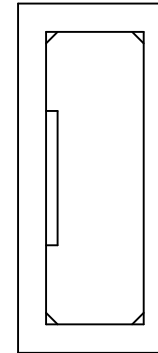

B


C

D

E


F

G

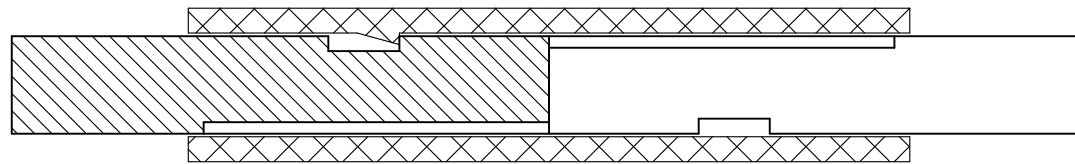

ASSEMBLY

H

						OPERATION	DRAW	CHENA	2010.02.11	SCALE		 森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED		
						~ 10 ±0.15	DESIGN			UNIT	mm	PART NO.	SCT2546H8	
						20 ~ 30 ±0.30		CHECK	MICKY	2010.02.11	SIZE	A4	TITLE:	Dupont2.54 H8 Housing
0	05/12/27	NEW				30 ~ ±0.50		APPROVE	HELLEN	2010.02.11	SHEET	1/1	DRAWING NO.	SCT2546
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 2'				PROJ.	◆			
						DIM TOL								

1 2 3 4 5 6 7 8 9 10