

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E

F

G

H

A

B

C



D

E

F

G

H

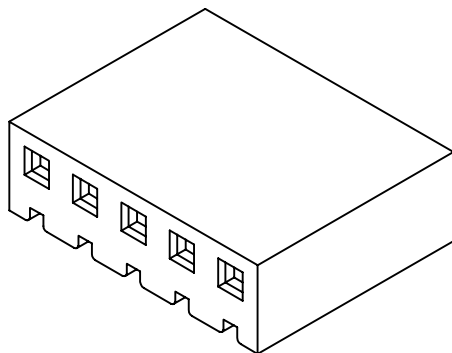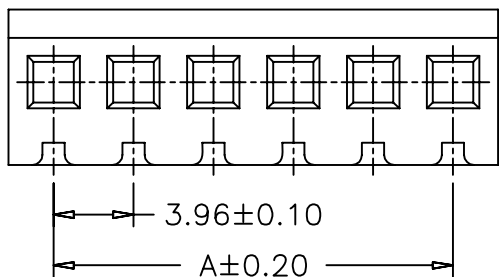


**SPECIFICATIONS**


Voltage Rating: 250V AC/DC  
 Current Rating: 7A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**

Part No: SCT3960HA-XXP  
 Pole: 02-20  
 Material: Nylon 66, UL94V-2

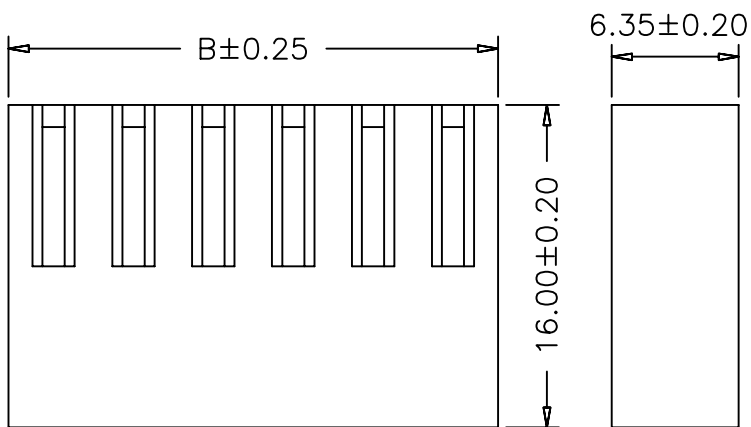

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
SCT3960HA-2P	3.96	8.43	SCT3960HA-12P	43.56	48.03
SCT3960HA-3P	7.92	12.39	SCT3960HA-13P	47.52	51.99
SCT3960HA-4P	11.88	16.35	SCT3960HA-14P	51.48	55.95
SCT3960HA-5P	15.84	20.31	SCT3960HA-15P	55.44	59.91
SCT3960HA-6P	19.80	24.27	SCT3960HA-16P	59.40	63.87
SCT3960HA-7P	23.76	28.23	SCT3960HA-17P	63.36	67.83
SCT3960HA-8P	27.72	32.19	SCT3960HA-18P	67.32	71.79
SCT3960HA-9P	31.68	36.15	SCT3960HA-19P	71.28	75.75
SCT3960HA-10P	35.64	40.11	SCT3960HA-20P	75.24	79.71
SCT3960HA-11P	39.60	44.07			

					OPERATION	DRAW	CHENA	2005.03.13	SCALE		 <b>森康达电子有限公司</b> SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2005.03.13	SIZE	A4		
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2005.03.13	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2° DIM TOL	APPROVE	HELLEN	2005.03.13	PROJ.	◆	PART NO.	SCT3960HA-XXP
											TITLE:	MOLEX3.96 HOUSING
											DRAWING NO.	SCT3960

1 2 3 4 5 6 7 8 9 10