

1 2 3 4 5 6 7 8 9 10

A

B

C




D

E

F

G

H

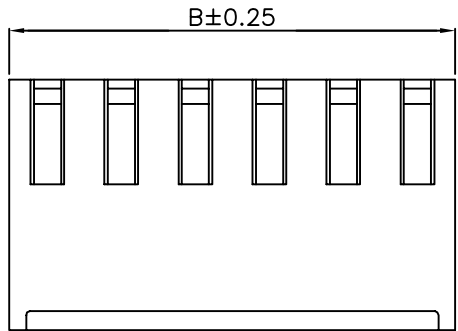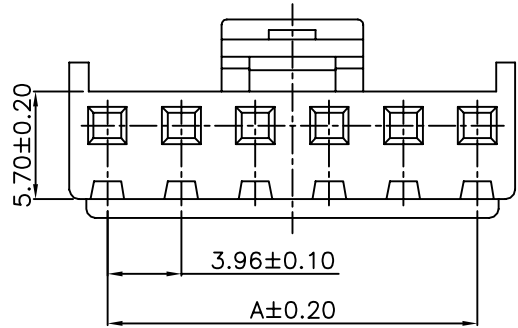


SPECIFICATIONS

Voltage Rating:250V AC/DC
 Current Rating:7A AC/DC
 Withstanding Voltage:1500VAC/minute
 Insulation Resistance:1000MΩ min.
 Temperature Range:-25°C - +85°C
 Contact Resistance:20mΩ max

HOUSING
 Part No: SCT3961H-XXP
 Pole: 02-12
 Material:Nylon 66,UL94V-0

PART NO	DIMENSION	
	A	B
SCT3961H-02	3.96	8.20
SCT3961H-03	7.92	12.16
SCT3961H-04	11.88	16.12
SCT3961H-05	15.84	20.08
SCT3961H-06	19.80	24.04
SCT3961H-07	23.76	28.00
SCT3961H-08	27.72	31.96
SCT3961H-09	31.68	35.92
SCT3961H-10	35.64	39.92
SCT3961H-11	39.60	43.88
SCT3961H-12	43.56	47.84

					OPERATION	DRAW	CHENA	2005.03.18	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2005.03.18	SIZE	A4	PART NO.	SCT3961H-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2005.03.18	SHEET	1/1	TITLE:	VH3.96 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'				PROJ.	◆ ⇐	DRAWING NO.	SCT3961
					DIM TOL							

1 2 3 4 5 6 7 8 9 10