
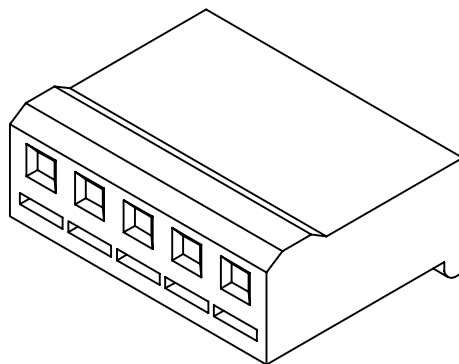


1 2 3 4 5 6 7 8 9 10

A

A

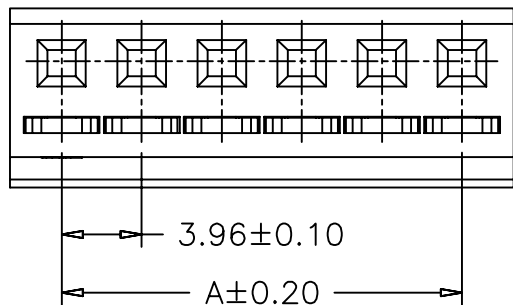

**SPECIFICATIONS**


Voltage Rating: 250V AC/DC  
 Current Rating: 7A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**

Part No: SCT3962H-XXP  
 Pole: 02-12  
 Material: Nylon 66, UL94V-2

D

D

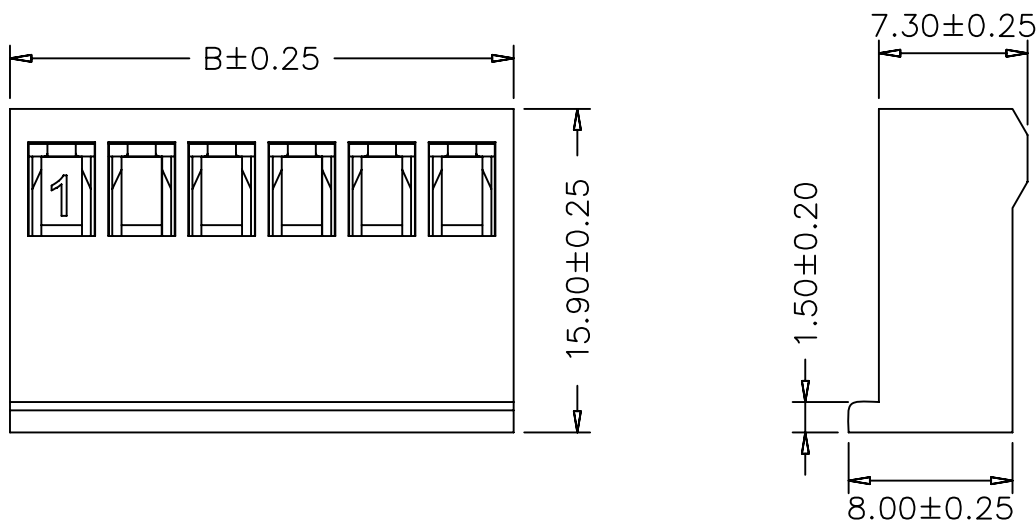

PART NO.	Dimensions	
	A	B
SCT3962H-02P	3.96	9.06
SCT3962H-03P	7.92	13.02
SCT3962H-04P	11.88	16.98
SCT3962H-05P	15.84	20.94
SCT3962H-06P	19.80	24.90
SCT3962H-07P	23.76	28.86
SCT3962H-08P	27.72	32.82
SCT3962H-09P	31.68	36.78
SCT3962H-10P	35.64	40.74
SCT3962H-11P	39.60	44.70
SCT3962H-12P	43.56	48.66

G

G

					OPERATION	DRAW	CHENA	2005.03.13	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2005.03.13	SIZE	A4	PART NO.	SCT3962H-XXP
0	05/12/27				30 ~ ±0.50	APPROVE	HELLEN	2005.03.13	SHEET	1/1	TITLE:	MOLEX5195 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'				PROJ.	↺	DRAWING NO.	SCT3962
					DIM TOL							

1 2 3 4 5 6 7 8 9 10