


SPECIFICATIONS
 Voltage Rating: 600V AC/DC
 Current Rating: 9A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -40° C - +105° C
 Contact Resistance: 20mΩ max

HOUSING
 Part No: SCT4201MH-2xXXP
 Pole: 2x1-12
 Material: Nylon 66, UL94V-2

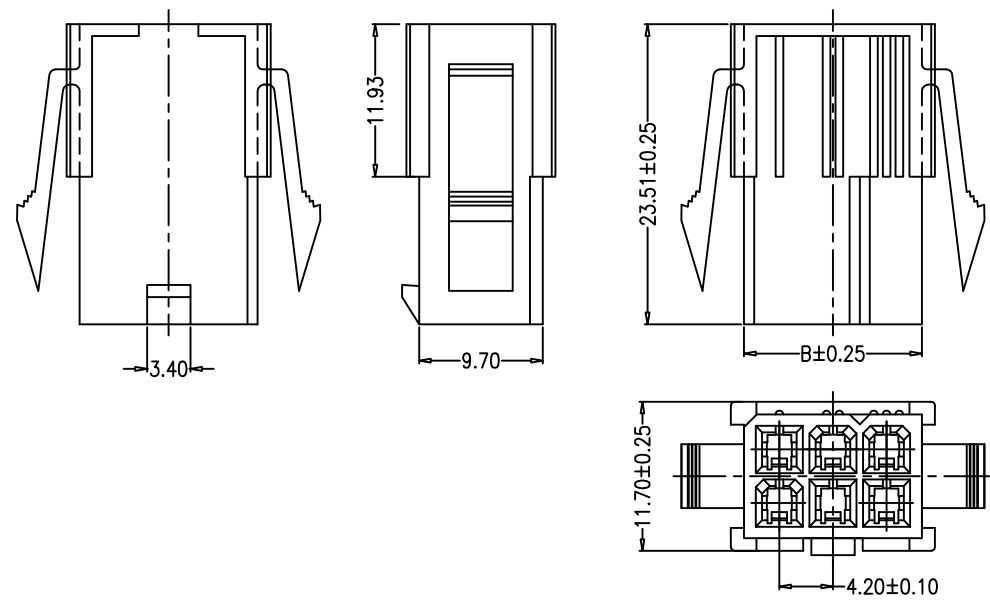

PART NO.	Dimensions	
	A	B
SCT4201FH-2X 01P	---	5.40
SCT4201FH-2X 02P	4.20	9.60
SCT4201FH-2X 03P	8.40	13.80
SCT4201FH-2X 04P	12.60	18.00
SCT4201FH-2X 05P	16.80	22.20
SCT4201FH-2X 06P	21.00	26.40
SCT4201FH-2X 07P	25.20	30.60
SCT4201FH-2X 08P	29.40	34.80
SCT4201FH-2X 09P	33.60	39.00
SCT4201FH-2X 10P	37.80	43.20
SCT4201FH-2X 11P	42.00	47.40
SCT4201FH-2X 12P	46.20	51.60

						OPERATION	DRAW	JUDY	2016.12.15	SCALE		 森康达电子有限公司 S'CONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		PART NO.
						20 ~ 30 ±0.30	CHECK	MICKY	2016.12.15	SIZE	A4	TITLE:	MOLEX4.2 MALE HOUSING
0	05/12/27	NEW				30 ~ ±0.50	APPROVE	HELLEN	2016.12.15	SHEET	1/1	DRAWING NO.	SCT4201
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 2'				PROJ.	☯		
						DIM TOL							