
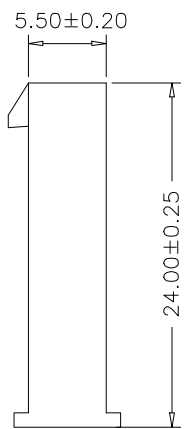
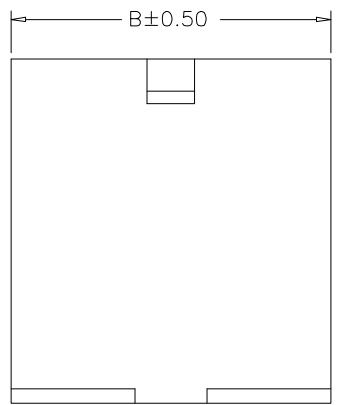
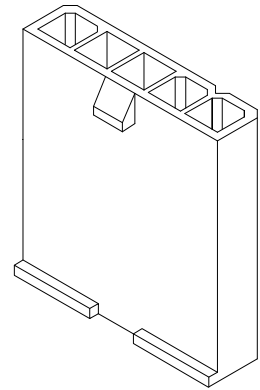


1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

A
B
C
D
E
F
G




SPECIFICATIONS

Voltage Rating: 600V AC/DC
Current Rating: 9A AC/DC
Withstanding Voltage: 1500V AC/minute
Insulation Resistance: 1000MΩ min.
Temperature Range: -25° C - +85° C
Contact Resistance: 20mΩ max

HOUSING

Part No: SCT4201FHA-XXP
Pole: 2-05
Material: Nylon 66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT4201FHA- 02P	4.20	9.60
SCT4201FHA- 03P	8.40	13.80
SCT4201FHA- 04P	12.60	18.00
SCT4201FHA- 05P	16.80	22.20

					OPERATION	DRAW	JUDY	2007.05.09	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30				SIZE	A4	PART NO.	SCT4201FHA-XXP
0	05/12/27	NEW			30 ~ ±0.50	CHECK	MICKY	2007.05.09	SHEET	1/1	TITLE:	MOLEX4.2 FEMALE HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'	APPROVE	HELLEN	2007.05.09	PROJ.	◆ ←	DRAWING NO.	SCT4201
					DIM TOL							

1 2 3 4 5 6 7 8 9 10