

P.C.B LAYOUT

SPECIFICATIONS

Voltage Rating: 600V AC/DC

Current Rating: 9A AC/DC

Withstanding Voltage: 1500V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max




WAFER

Part No: SCT4201WR-F-XXP

Pole: 02-05

Material: Nylon 66, UL94V-2

Pin: Brass, Tin plated

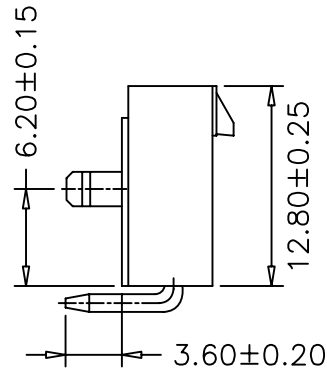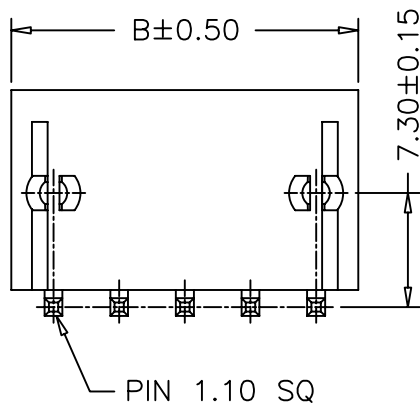

PART NO.	Dimensions	
	A	B
SCT4201WR-F-02P	4.20	9.60
SCT4201WR-F-03P	8.40	13.80
SCT4201WR-F-04P	12.60	18.00
SCT4201WR-F-05P	16.80	22.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	JUDY	2007.05.09	SCALE	UNIT	mm	SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	PART NO. SCT4201WR-F-XXP
0	05/12/27	NEW			~ 10 ±0.15	DESIGN							
					20 ~ 30 ±0.30	CHECK	MICKY	2007.05.09					
					30 ~ ±0.50	APPROVE	HELLEN	2007.05.09					
					Angle ± 2' DIM TOL							TITLE: MOLEX4.2 90C WAFER	
												DRAWING NO. SCT4201	