
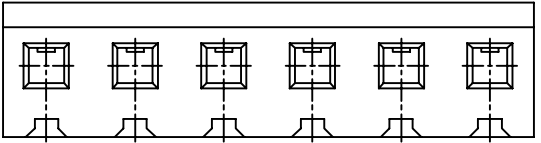



1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G

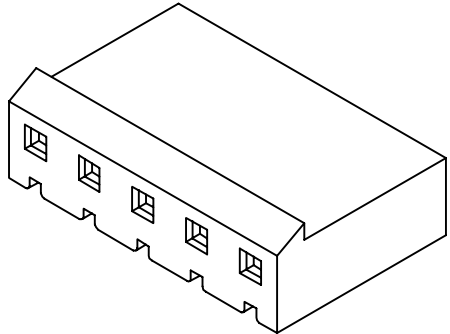


5.08±0.10  
A±0.20

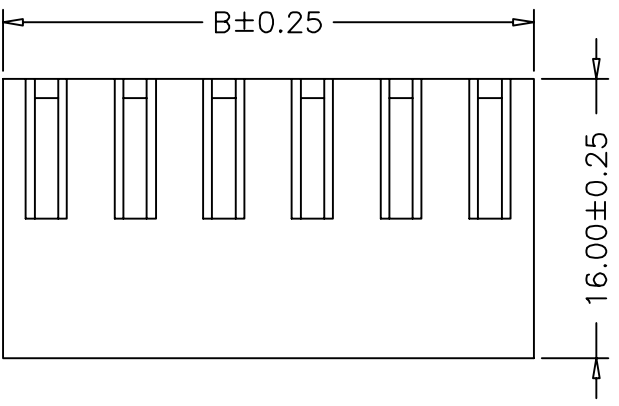

B±0.25

16.00±0.25

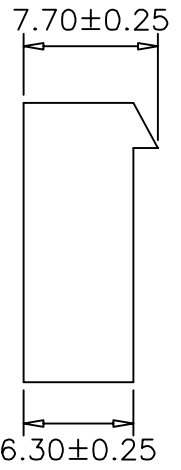

7.70±0.25

6.30±0.25

**SPECIFICATIONS**  
 Voltage Rating: 250V AC/DC  
 Current Rating: 7A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

**HOUSING**  
 Part No: SCT5080H-XXP  
 Poles: 2-20  
 Material: Nylon 66, UL94V-2

PART NO.	Dimensions	
	A	B
SCT5080H-02P	5.08	10.08
SCT5080H-03P	10.16	15.16
SCT5080H-04P	15.24	20.24
SCT5080H-05P	20.32	25.32
SCT5080H-06P	25.40	30.40
SCT5080H-07P	30.48	35.48
SCT5080H-08P	35.56	40.56
SCT5080H-09P	40.64	45.64
SCT5080H-10P	45.72	50.72
SCT5080H-11P	50.80	55.80
SCT5080H-12P	55.88	60.88
SCT5080H-13P	60.96	65.96
SCT5080H-14P	66.04	71.04
SCT5080H-15P	71.12	76.12
SCT5080H-16P	76.20	81.20
SCT5080H-17P	81.28	86.28
SCT5080H-18P	86.36	91.36
SCT5080H-19P	91.44	96.44
SCT5080H-20P	96.52	101.52

					OPERATION	DRAW	JUDY	2007.05.09	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2007.05.09	SIZE	A4	PART NO.	SCT5080H-XXP
					30 ~ ±0.50	APPROVE	HELLEN	2007.05.09	SHEET	1/1	TITLE:	MX5.08 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2' TOL			PROJ.	↻	DRAWING NO.	SCT5080

1 2 3 4 5 6 7 8 9 10