

1 2 3 4 5 6 7 8 9 10

A

B

C



D

E

F

G

H

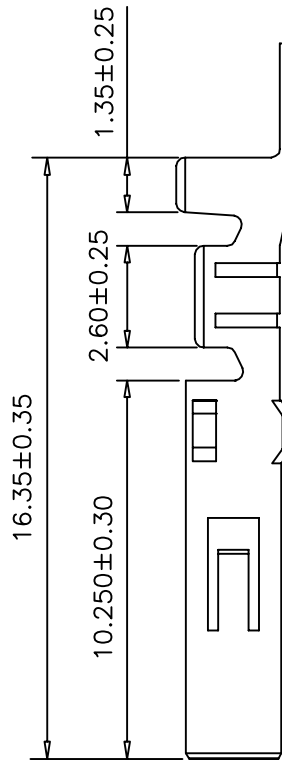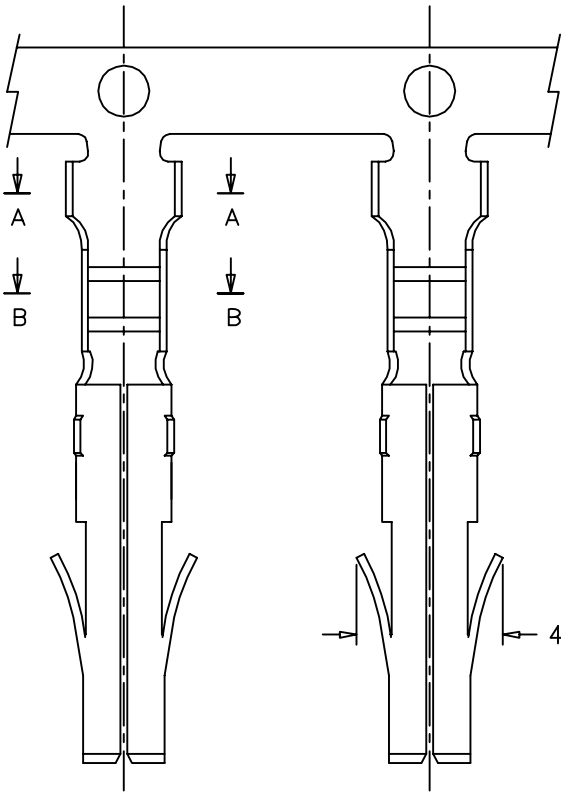


SPECIFICATIONS


Voltage Rating: 250V AC/DC
 Current Rating: 10A AC/DC
 Withstanding Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 20mΩ max

TERMINAL


Part No: SCT5083FTPB
 Wire Range: AWG#14-#20 (OD3.3mm max)
 Material: Brass
 Finish: Tin plated
 Thickness: 0.25
 Q' TY: 8,000PCS/Reel



A-A



B-B

						OPERATION	DRAW	SIMON	2015.01.20	SCALE		 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10 ±0.15	DESIGN			UNIT	mm		
						20 ~ 30 ±0.30	CHECK	MICKY	2015.01.20	SIZE	A4	PART NO.	SCT5083FTPB
						30 ~ ±0.50	APPROVE	HELLEN	2015.01.20	SHEET	1/1	TITLE:	MOLEX8981 FEMALE Terminal
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 2'				PROJ.	◆	DRAWING NO.	SCT5083
						DIM TOL							

1 2 3 4 5 6 7 8 9 10