


FPC/FPC Dimension

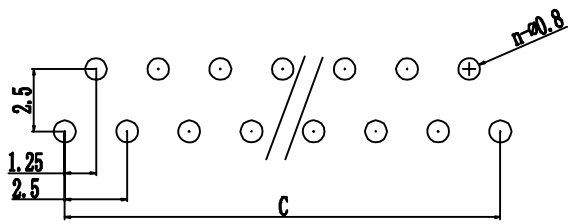

1.25-11-nP 印制线路板
P.C.B Layout

SPECIFICATIONS

Voltage Rating: 200V AC/DC
 Current Rating: 1A AC/DC
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 500MΩ min.
 Temperature Range: -25° C - +85° C
 Contact Resistance: 30mΩ max

WAFER

Part No: 125A-NPL
 Poles: 4-40
 Material: Base: Nylon 46, UL94V-0
 Contact: Phosphor Bronze
 Finish: Ni 50u" Tin 120u" Plated

22	31	28.8	27.5				
21	29.75	27.55	26.25	40	53.5	51.3	50
20	28.5	26.3	25	39	52.25	50.05	48.75
19	27.25	25.05	23.75	38	51	48.8	47.5
18	26	23.8	22.5	37	49.75	47.55	46.25
17	24.75	22.55	21.25	36	48.5	46.3	45
16	23.5	21.3	20	36	47.25	45.05	43.75
15	22.25	20.05	18.75	34	46	43.8	42.5
14	21	18.8	17.5	33	44.75	42.55	41.25
13	19.75	17.55	16.25	32	43.5	41.3	40
12	18.5	16.3	15	31	42.25	40.05	38.75
11	17.25	15.05	13.75	30	41	38.8	37.5
10	16	13.8	12.5	29	39.75	37.55	36.25
9	14.75	12.55	11.25	28	38.5	36.3	35
8	13.5	11.3	10	27	37.25	35.05	33.75
7	12.25	10.05	8.75	26	36	33.8	32.5
6	11	8.8	7.5	25	34.75	32.55	31.25
5	9.75	7.55	6.25	24	33.5	31.3	30
4	8.5	6.3	5	23	32.25	30.05	28.75
Poles	A	B	C	Poles	A	B	C

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	TITLE	DRAWING NO.
0	05/12/27	NEW			~ 10 ±0.15	Simon	2015.07.16	mm	A4	1/1	1.25 Positive 180C FPC	125A-NPL
					20 ~ 30 ±0.30							
					30 ~ ±0.50	jet yu	2015.07.16					
					Angle ± 2'	Hellen.Li	2015.07.16					
					DIM TOL							

